
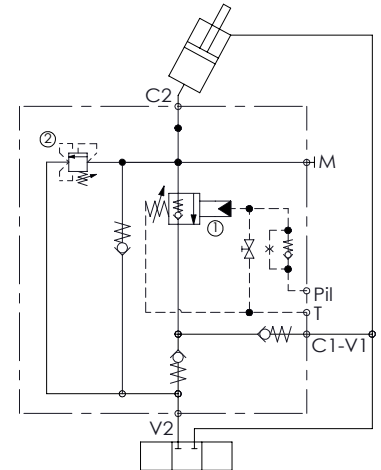



EXCAVATORS VALVE

MLST-160-RLGR

WITH OIL RECOVERY

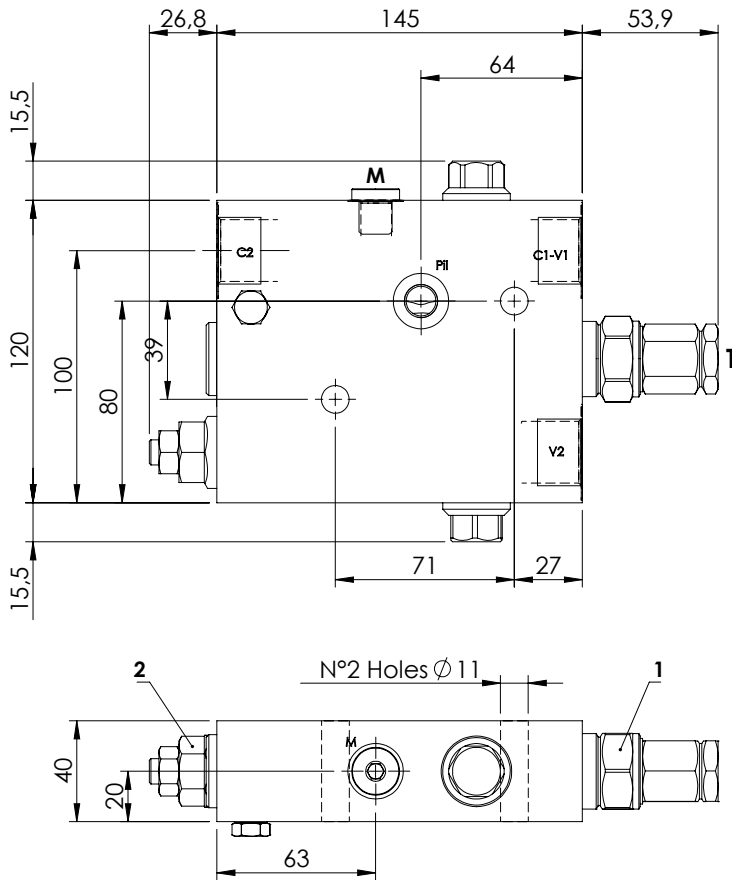


SPECIFICATIONS

Max. operating pressure:	420 bar
Rated flow:	160 l/min
Manifold:	Steel
Weight:	5,01 kg

NOTES

When correctly adjusted for the specific excavator installation, these valves meet the requirement of ISO 8643

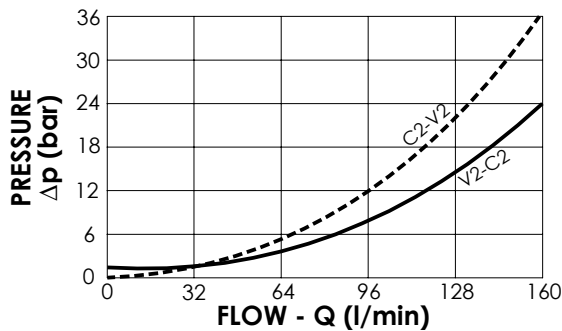

ORDERING CODES

Quick code	Description	Main ports size	Standard setting (bar)	Adjust. range (bar)	Pressure increase (bar/turn)
ML000165	MLST-160-RLGR-00-G34-N420	V2,C2: G 3/4" P11,T,M: G 1/4"	① 350 Q=5 l/min ② 7.5 Crack. pr.	① 350-400 ② 3-15	① 72 ② 8