

### SPECIFICATIONS


Max. operating pressure:	350 bar (5000 psi)
Rated flow:	15 l/min (4 gpm)
Cavity:	VP000098
Weight:	0,01 kg (0,02 lbs)
Contamination class to ISO 4406:	See technical spec.
Installation torque:	6 Nm (4,5 ft-lb)
MTF <sub>a</sub> :	150 years

Dimensions: mm [inches]

### NOTES

Bidirectional installations. Fit O-Ring to side first inserted in cavity.

### CURVES

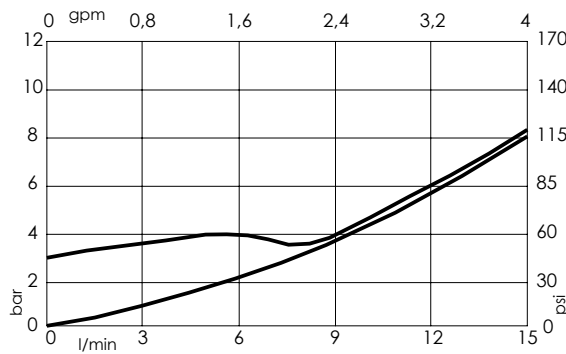

### ORDERING CODES

Quick code	Description	Cracking pressure	
CD000026	CDVN-015-SSNS-FN-098-N003	3 bar (50 psi)	
CD000043	CDVN-015-SSNS-FN-098-N000	0	