



# MBDN-060-LMSF

OVERCENTRE  
WITH BRAKE RELEASE

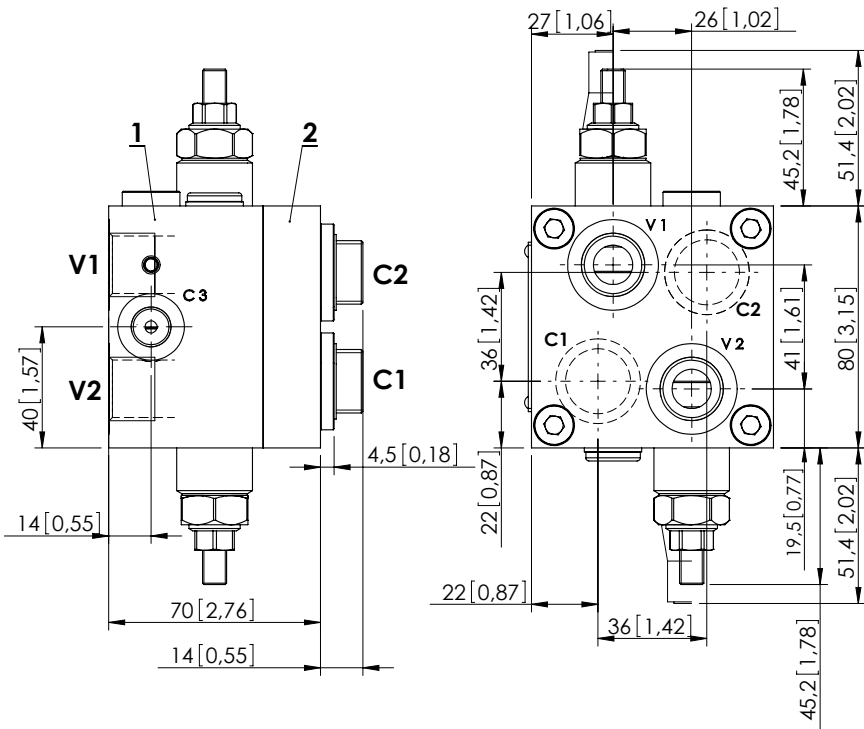

Dimensions: mm [inches]



## SPECIFICATIONS

Max. operating pressure:	250 bar (3600 psi)
Rated flow:	60 l/min (16 gpm)
Manifold:	Anodized Aluminium
Weight:	1,59 kg (3,51 lbs)
Contamination class to ISO 4406:	See technical spec.
MTF <sub>a</sub> :	150 years

## NOTES


Setting: at least 1.3 times the load induced pressure.  
Designed for OMP motors  
Valve composed by:  
1.MB000520  
2.MP000013

## SEALING CAP



Ordering code:  
AT000020

## CURVES

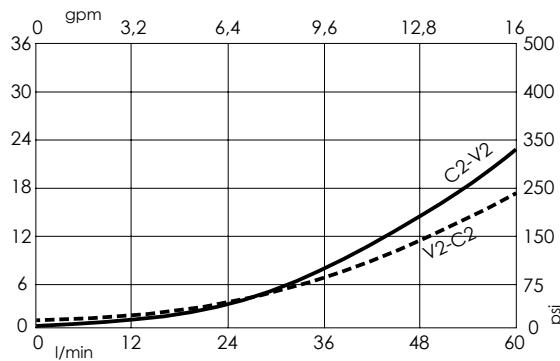

## ORDERING CODES

Quick code	Description	Pilot ratio	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MB000208	MBDN-060-LMSF-04-G12-N200-NOMP	4,2:1	V1, V2: G 1/2" C1, C2: OMP flange C3: G1/4"	200 bar (2900 psi)	60-210 bar (850-3000 psi)	62 bar/turn (900 psi/turn)