



FILTER VALVE

BPND-025-LLUM

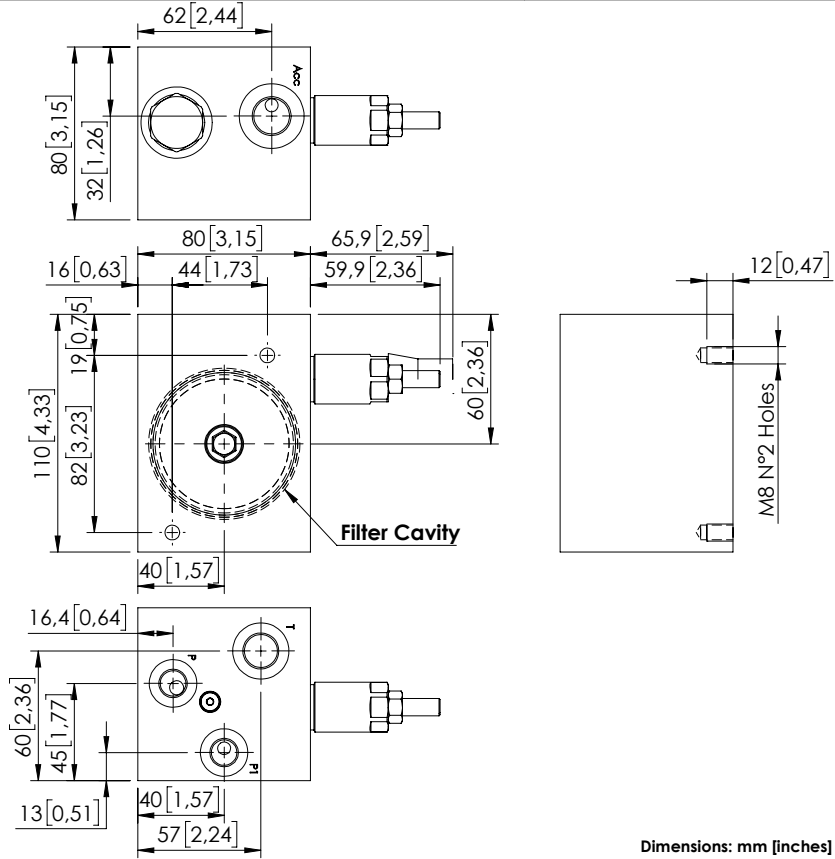

Dimensions: mm [inches]

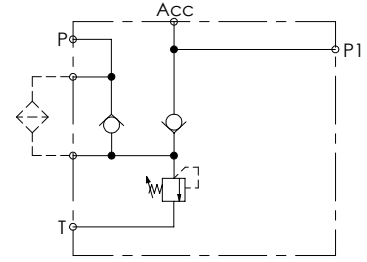


SPECIFICATIONS

Max. operating pressure:	100 bar (1500 psi)
Rated flow:	25 l/min (7 gpm)
Weight:	1,7 kg 3,75 lbs)
Manifold:	Aluminium
Contamination class to ISO 4406:	See technical spec.
MTTFd:	150 - 1200 years: See technical spec.

NOTES


For filter cavity information or special version ask AFT sales network.
For other configurations/quick codes not available in this catalogue page please consult factory

SEALING CAP



Ordering code:
AT000020

CURVES

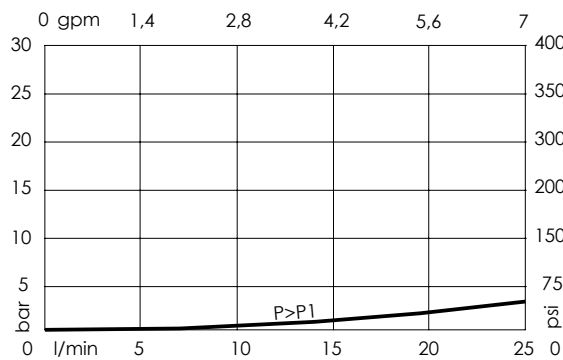

ORDERING CODES

Quick code	Description	Ports	Standard setting Q=5 l/min (1,3 gpm)	Setting range	Pressure increase
BP000109	BPND-025-LLUM-NP-G38-N100	P1,P: G 1/4" T: G 3/8" Acc: M18x1,5	25 bar (350 psi)	10-50 bar (150-700 psi)	10 bar/turn (150 psi/turn)