


CHECK VALVE

CDVN-030-SSNS

MONO DIRECTIONAL
SPHERE TYPE

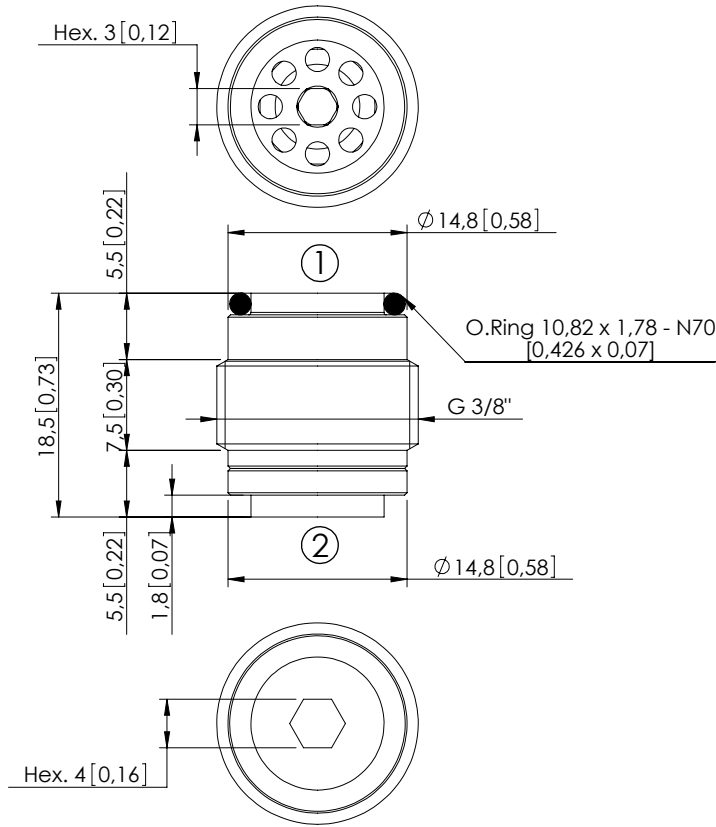

SPECIFICATIONS


Max. operating pressure:	350 bar (5000 psi)
Rated flow:	30 l/min (8 gpm)
Cavity:	VP000310
Weight:	0,02 kg (0,04 lbs)
Contamination class to ISO 4406:	See technical spec.
Installation torque:	8 Nm (6 ft-lb)
MTTFa:	150 years

Dimensions: mm [inches]

NOTES

Bidirectional installations. Fit O-Ring to side first inserted in cavity.

CURVES

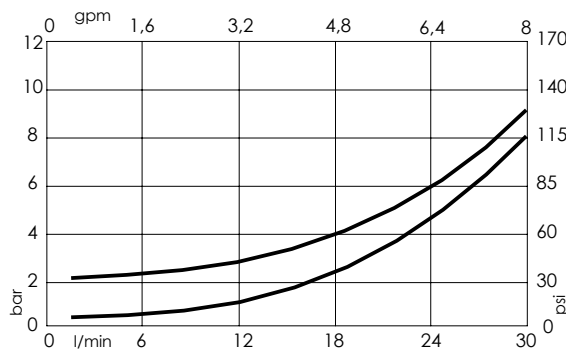

ORDERING CODES

Quick code	Description	Cracking pressure	
CD000029	CDVN-030-SSNS-FN-310-N002	2 bar (25 psi)	
CD000058	CDVN-030-SSNS-FN-310-N000	0	