
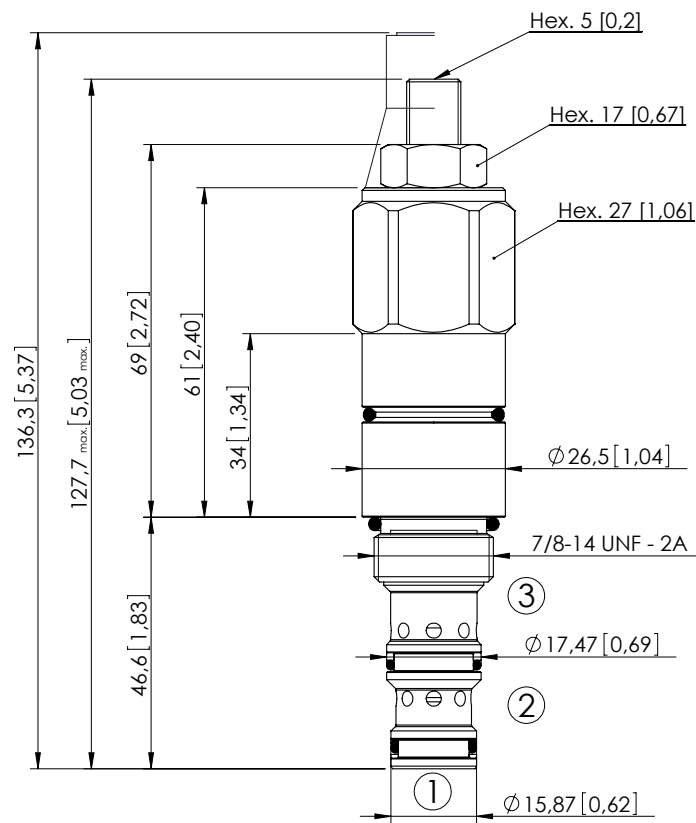


CDLN-040-CCVE

SPOOL TYPE - VENTED
EXTERNAL PILOT


SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	40 l/min (11 gpm)
Cavity:	SAE-10-3N
Weight:	0,33 kg (0,73 lbs)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RB700092
Installation torque:	55 - 62 Nm (41 - 46 ft-lb)
MTTFd:	150 years

NOTES


For other configurations/quick codes not available in this catalogue page please consult factory

OPTIONS




Adjustment
with Screw

SEALING CAP



Ordering code:
AT000021

CURVES

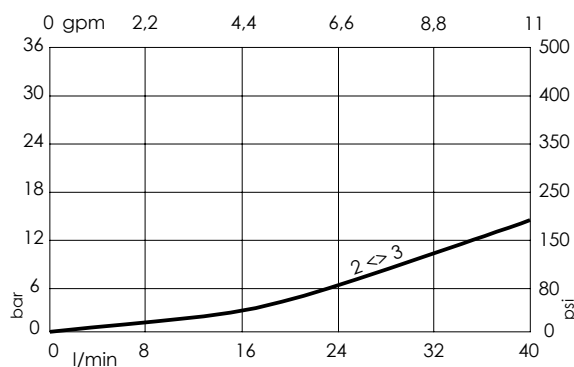

ORDERING CODES

Quick code	Description	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase	Option
CD000122	CDLN-040-CCVE-HN-S10-N180	120 bar (1700 psi)	20-180 bar (300-2600 psi)	22 bar/turn (300 psi/turn)	Adjustment with Screw
CD000214	CDLN-040-CCVE-HN-S10-N100	50 bar (700 psi)	15-100 bar (200-1400 psi)	6,7 bar/turn (100 psi/turn)	Adjustment with Screw