
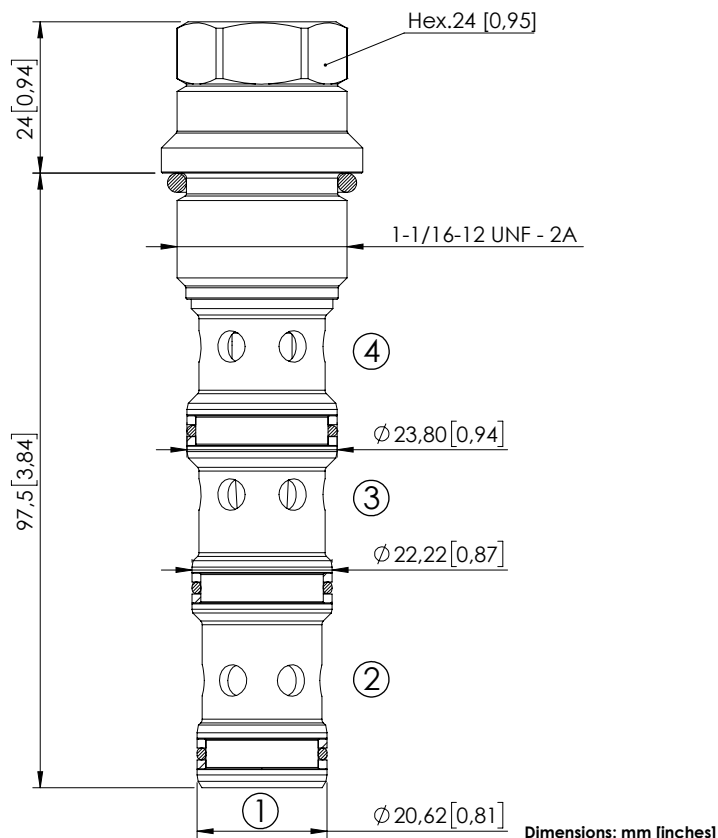


## CDLN-120-CDPB

DIRECT ACTING  
SPOOL TYPE


## SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	120 l/min (32 gpm)
Cavity:	SAE-12-4N
Weight:	0,3 kg (0,69 lbs)
Installation torque:	110 - 120 Nm (81 - 86 ft-lb)
Seal kit:	RB700103
Contamination class to ISO 4406:	See technical spec.
MTTF <sub>d</sub> :	150 years

## NOTES

For other configurations/quick codes not available in this catalogue page please consult factory

## CURVES

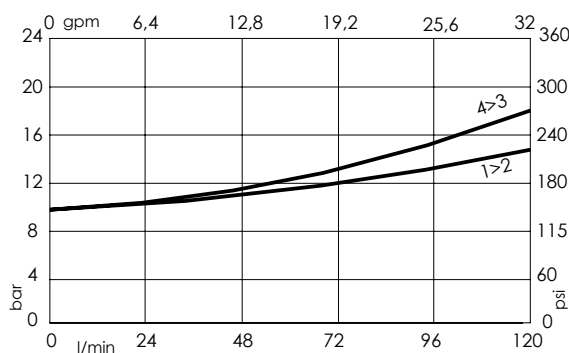

## ORDERING CODES

Quick code	Description	Cracking pressure	
CD000336	CDLN-120-CDPB-FH-S12-N010	10 bar (150 psi)	