



SOLENOID OPERATED CARTRIDGE

CEBN-080-NAFN-06

PILOT OPERATED
POPPET TYPE

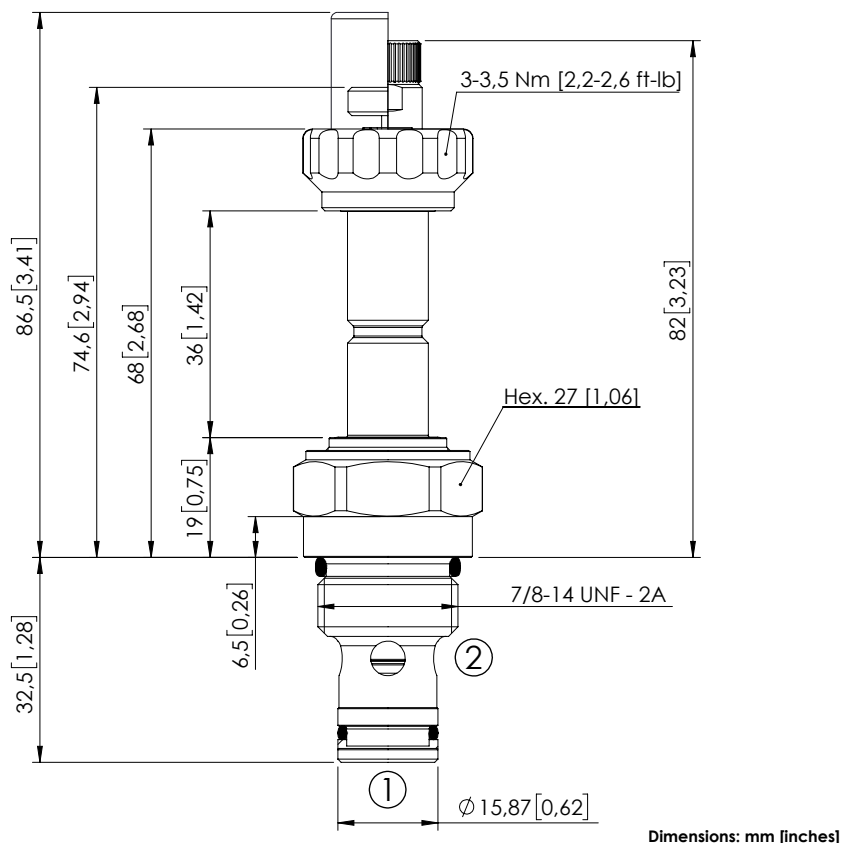

Dimensions: mm [inches]



SPECIFICATIONS

Max. operating pressure:	350/500 bar (5000/7200 psi)
Rated flow:	80 l/min (21 gpm)
Cavity:	SAE-10-2N
Weight:	0,18 kg (0,40 lbs)
Min. voltage required:	90% of nominal
Coil type:	M7 or M3 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RA900082
Installation torque:	55 - 62 Nm (41 - 46 ft-lb)
MTF _d :	150 years

NOTES

For other configurations/quick codes not available in this catalogue page please consult factory

CURVES

OPTIONS

Standard




Push style override




Knob style override



SEALING CAP



Ordering code:
AT000113

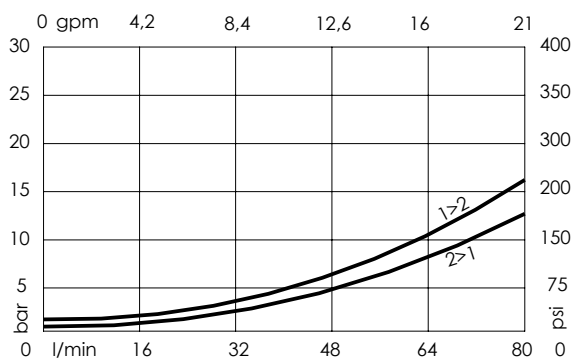

ORDERING CODES

Quick code	Description	Options	Max operating pressure	
CE000271	CEBN-080-NAFN-06-S10-N350	Standard	350 bar (5000 psi)	
CE000272	CEBN-080-NAFP-06-S10-N350	Push style override	350 bar (5000 psi)	
CE000273	CEBN-080-NAFK-06-S10-N350	Knob style override	350 bar (5000 psi)	
CE000571	CEBN-080-NAFN-06-S10-N500	Standard	500 bar (7200 psi)	
CE000572	CEBN-080-NAFP-06-S10-N500	Push style override	500 bar (7200 psi)	
CE000573	CEBN-080-NAFK-06-S10-N500	Knob style override	500 bar (7200 psi)	