



SOLENOID OPERATED CARTRIDGE

CEFS-030-SEFN

DIRECT OPERATED
SPOOL TYPE

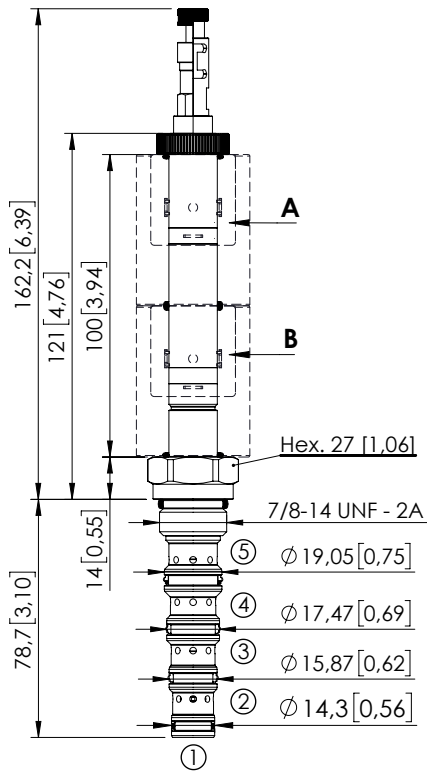

Dimensions: mm [inches]

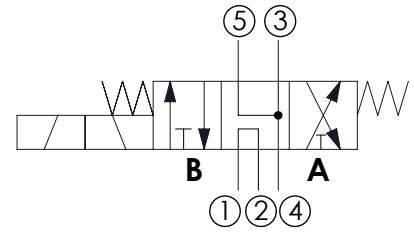

SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Max. operating pressure on port 1:	210 bar (3000 psi)
Rated flow:	30 l/min (8 gpm)
Cavity:	SAE-10-5N
Weight:	0,22 kg (0,68 lbs)
Min. voltage required:	90% of nominal
Coil type:	M16 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RB900107
Installation torque:	55 - 62 Nm (41 - 46 ft-lb)
MTF _a :	150 years
Leakage:	120 cm ³ /min (@46 cSt) 7,3 in ³ /min (@46 cSt)

NOTES

For other configurations/quick codes not available in this catalogue page please consult factory


OPTIONS




Standard



Push and pull manual override



Push pull and twist manual override

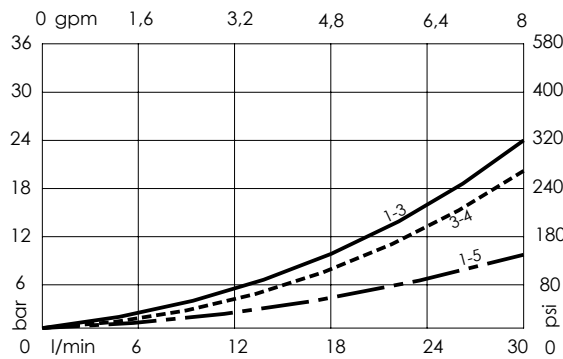

ORDERING CODES

Quick code	Description	Options
CE000795	CEFS-030-SEFN-104-S10-N350	Standard
CE001011	CEFS-030-SEFL-104-S10-N350	Push and pull manual override
CE001012	CEFS-030-SEFG-104-S10-N350	Push pull and twist manual override