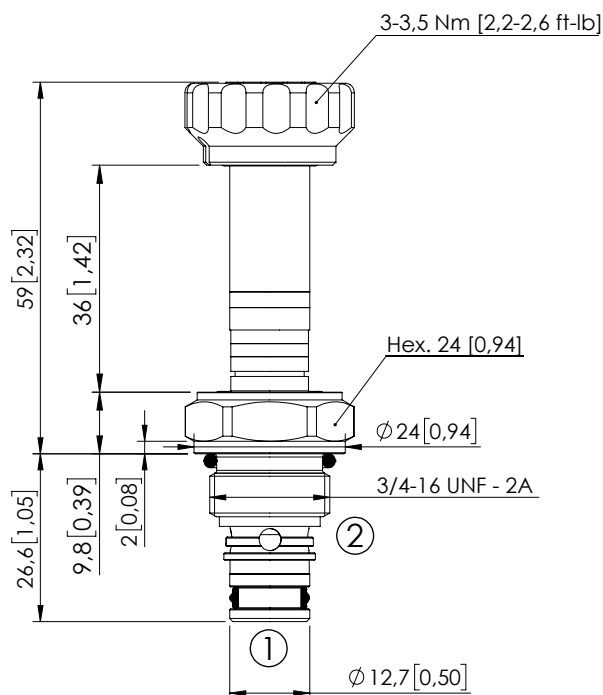



SOLENOID OPERATED CARTRIDGE

CEBD-015-NCFN-21DIRECT OPERATED
POPPET TYPE

Dimensions: mm [inches]

**SPECIFICATIONS**


Max. operating pressure:	350 bar (5000 psi)
Max. operating pressure on port 1:	280 bar (4000 psi)
Rated flow:	15 l/min (4 gpm)
Cavity:	SAE-08-2N
Weight:	0,1 kg (0,22 lbs)
Min. voltage required:	90% of nominal
Coil type:	M7 or M3 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RA700081
Installation torque:	45 - 50 Nm (33 - 37 ft-lb)
MTF _d :	150 - 1200 years: See technical spec.

NOTES

For other configurations/quick codes not available in this catalogue page please consult factory

OPTIONS

Standard

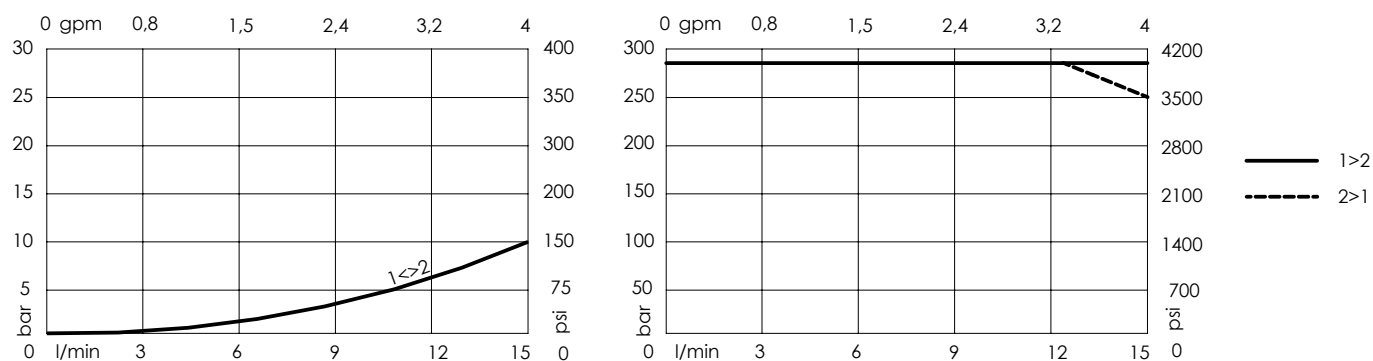**CURVES****ORDERING CODES**

Quick code	Description	Options	
CE000966	CEBD-015-NCFN-21-S08-N350	Standard	

Revision B