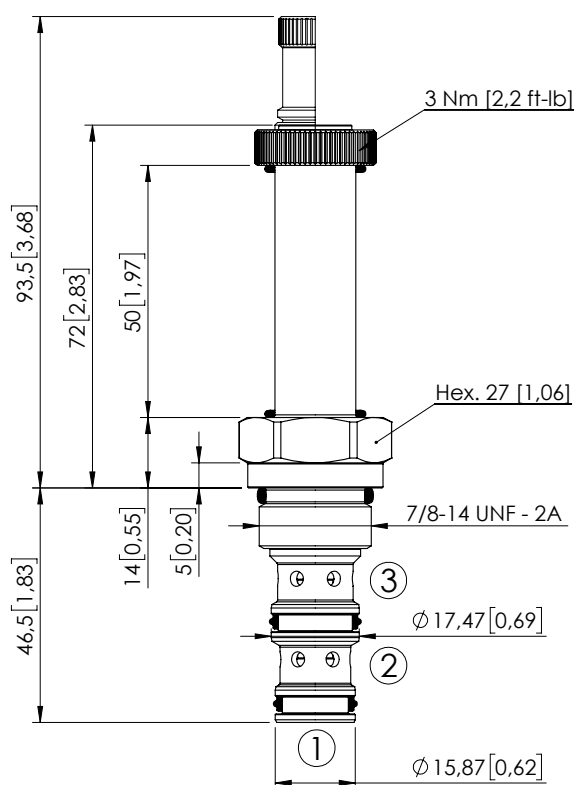



## SOLENOID OPERATED CARTRIDGE

**CECS-030-SEFN-61**DIRECT ACTING  
SPOOL TYPE

Dimensions: mm [inches]

**SPECIFICATIONS**



Max. operating pressure:	350 bar (5000 psi)
Rated flow:	30 l/min (8 gpm)
Cavity:	SAE-10-3N
Weight:	0,2 kg (0,44 lbs)
Min. voltage required:	90% of nominal
Coil type:	M16 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RB600092
Installation torque:	55 - 62 Nm (41 - 46 ft-lb)
MTF <sub>d</sub> :	150 - 1200 years: See technical spec.
Leakage:	70 cm <sup>3</sup> /min (@46 cSt) 4,2 in <sup>3</sup> /min (@46 cSt)

**NOTES**

For other configurations/quick codes not available in this catalogue page please consult factory

**OPTIONS**

Standard

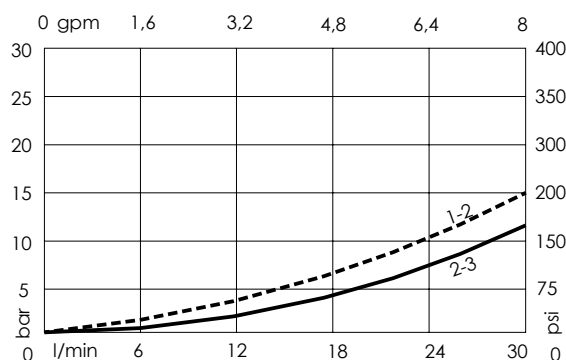Knob style  
override**CURVES****ORDERING CODES**

Quick code	Description	Options	
CE000985	CECS-030-SEFN-61-S10-N350	Standard	
CE000986	CECS-030-SEFE-61-S10-N350	Knob style override	