



# SOLENOID OPERATED CARTRIDGE

## CEBN-025-NCGN

HIGH PRESSURE  
POPPET TYPE  
FLANGED BODY

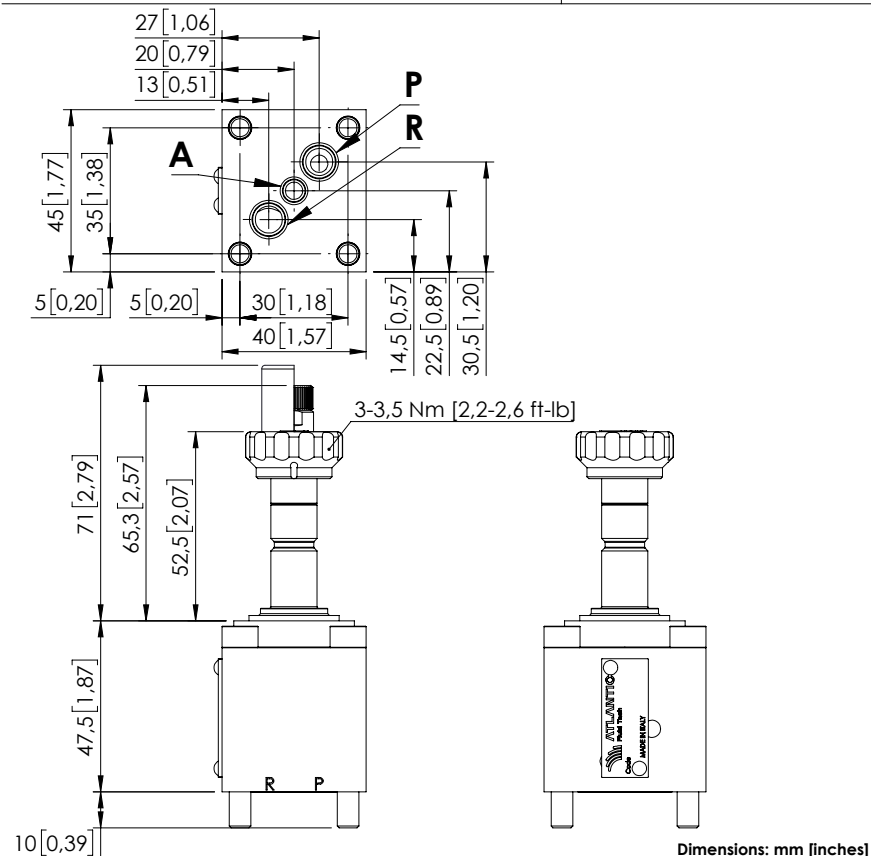

### SPECIFICATIONS

Max. operating pressure:	600 bar (8700 psi)
Rated flow:	25 l/min (7 gpm)
Manifold:	Steel
Weight:	0,66 kg (1,45 lbs)
Min. voltage required:	90% of nominal
Coil type:	M7 or M3 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Mounting screw torque:	9,5 Nm (7 ft-lb)
MTTFd:	150 years

### NOTES

For other configurations/quick codes not available in this catalogue page please consult factory

### OPTIONS


Standard



Knob style override




### SEALING CAP



Ordering code:  
AT000113

### CURVES

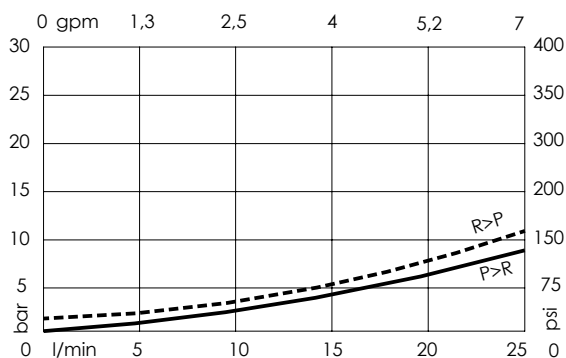

### ORDERING CODES

Quick code	Description	Options	Ports size
CE001078	CEBN-025-NCGN-01-F45-N600	Standard	R,P: Ø7,5 [0,30] A: Ø4,5 [0,18]
CE001081	CEBN-025-NCGN-01-F45-N600	Knob style override	R,P: Ø7,5 [0,30] A: Ø4,5 [0,18]