
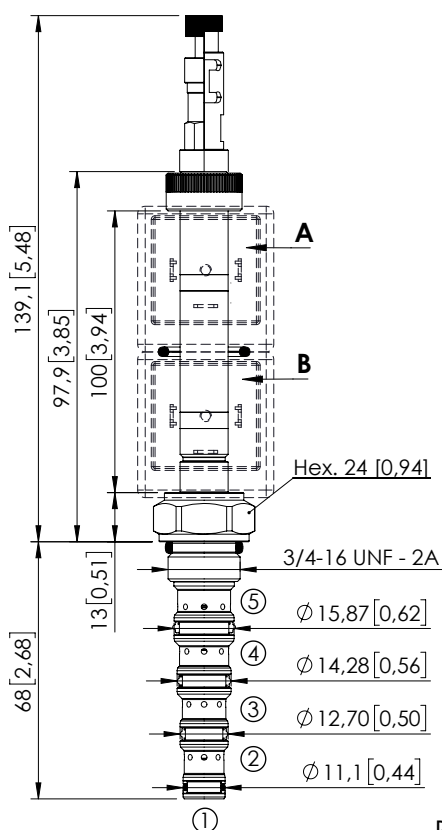


SOLENOID OPERATED CARTRIDGE

CEFS-010-SEFN

DIRECT OPERATED
SPOOL TYPE

Dimensions: mm [inches]

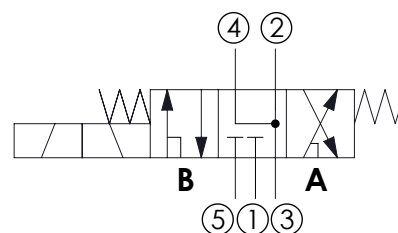

SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Max. operating pressure on port 1:	210 bar (3000 psi)
Rated flow:	10 l/min (8 gpm)
Cavity:	SAE-08-5N
Weight:	0,25 kg (0,68 lbs)
Min. voltage required:	90% of nominal
Coil type:	M7 or M3 type
Ambient temperature:	-20/+50 °C (-4/+122 °F)
Contamination class to ISO 4406:	See technical spec.
Seal kit:	RB900106
Installation torque:	45 - 50 Nm (41 - 46 ft-lb)
MTTFd:	150 years
Leakage:	120 cm ³ /min (@46 cSt) 7,3 in ³ /min (@46 cSt)

NOTES

For other configurations/quick codes not available in this catalogue page please consult factory


OPTIONS




Standard



Push and
pull manual
override



Push pull and
twist manual
override

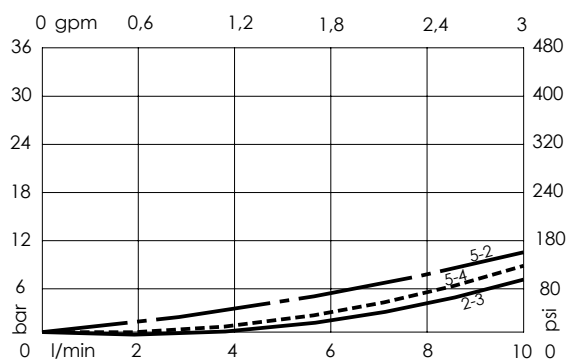

ORDERING CODES

Quick code	Description	Options	
CE001817	CEFS-010-SEFN-107-S08-N350	Standard	
CE001818	CEFS-010-SEFL-107-S08-N350	Push and pull manual override	
CE001819	CEFS-010-SEFG-107-S08-N350	Push pull and twist manual override	