



CFSN-070-BHRR

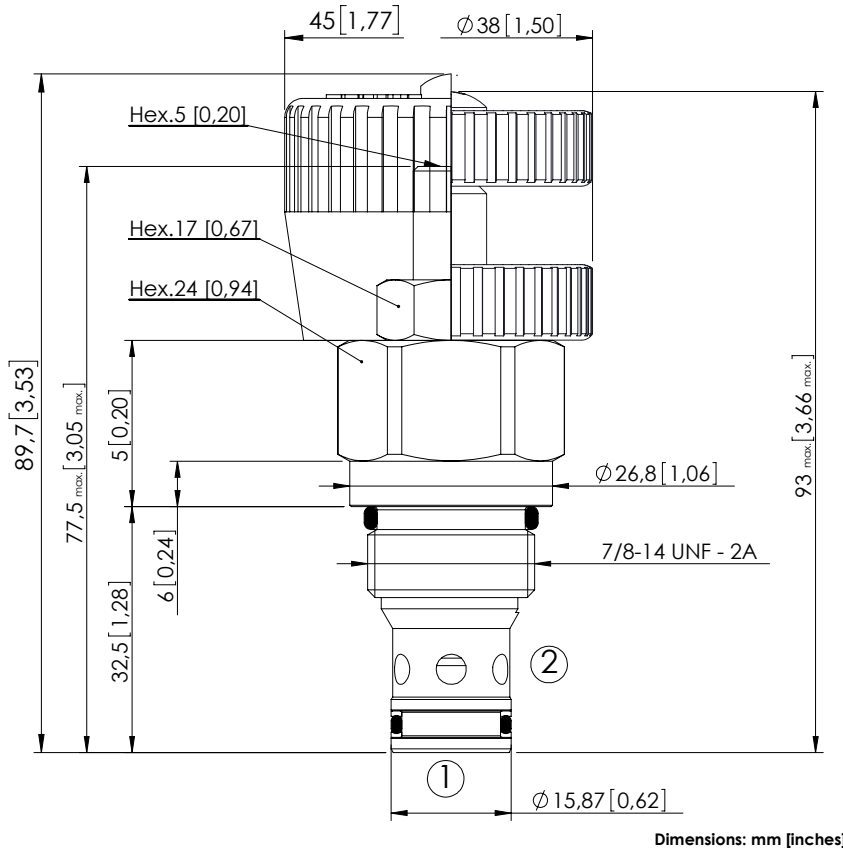

Dimensions: mm [inches]



SPECIFICATIONS


Max. operating pressure:	350 bar (5000 psi)
Rated flow:	70 l/min (19 gpm)
Cavity:	SAE 10 2N
Weight:	0,17 kg (0,37 lbs)
Seal kit:	RB700082
Installation torque:	55 - 62 Nm (41 - 46 ft-lb)
Contamination class to ISO 4406:	See technical spec.
MTF _d :	150 - 1200 years: See technical spec.

NOTES

For other configurations/quick codes not available in this catalogue page please consult factory

CURVES

OPTIONS




Screw and locknut



Handknob and locknut



Graduated handknob

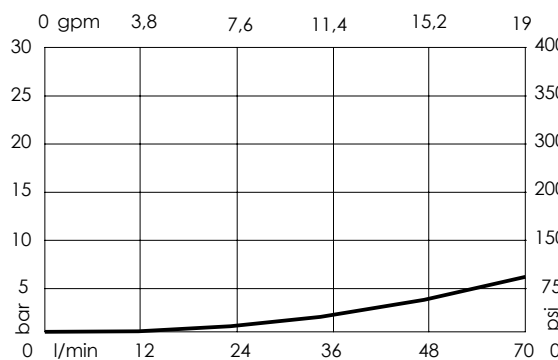

Fully open
Both directions

ORDERING CODES

Quick code	Description	Options
CF000136	CFSN-070-BHRR-NP-S10-N350	Screw and locknut
CF000116	CFSN-070-BVRR-NP-S10-N350	Handknob and locknut
CF000225	CFSN-070-BMRR-NP-S10-N350	Graduated handknob