
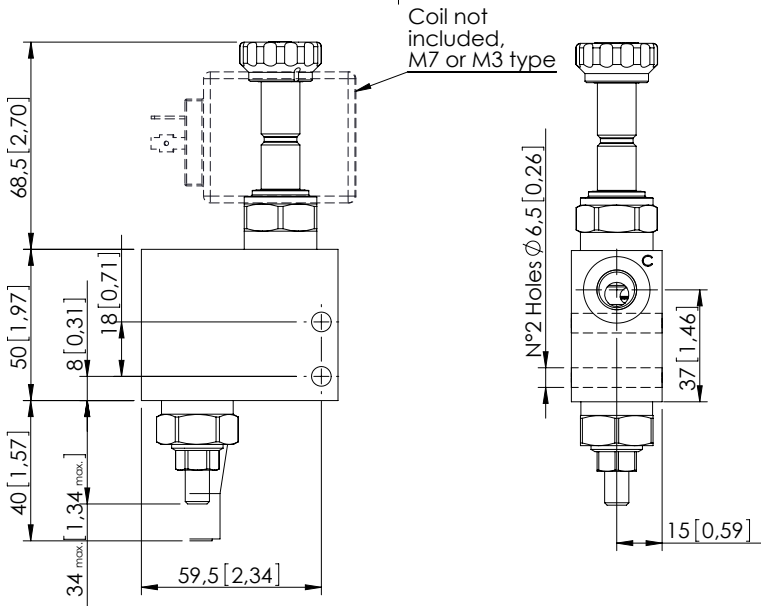



SEQUENCE VALVE IN BODY

KPEN-020-DPLD

DIRECT ACTING
SOLENOID BY-PASS



Dimensions: mm [inches]



SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	20 l/min (5 gpm)
Manifold:	Steel
Weight:	0,83 kg (1,83 lbs)
Contamination class to ISO 4406:	See technical spec.
MTTFa:	150 years


NOTES

SEALING CAP



Ordering code:
AT000020

CURVES

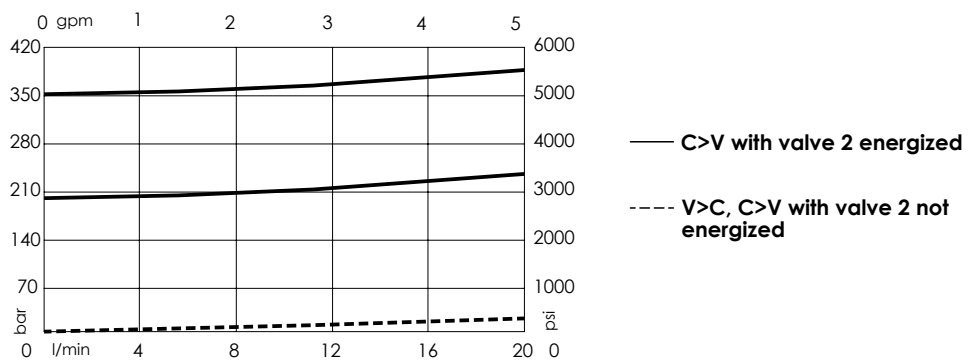

ORDERING CODES

Quick code	Description	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
KP000109	KPEN-020-DPLD-SN-G14-N350	C,P: G 1/4"	350 bar (5000 psi)	175-350 bar (2500-5000 psi)	177 bar/turn (2600 psi/turn)
KP000110	KPEN-020-DPLD-SN-G14-N210	C,P: G 1/4"	200 bar (2900 psi)	105-210 bar (1500-3000 psi)	80 bar/turn (1100 psi/turn)