

LA3

ELECTROMAGNETIC LEVEL SWITCH
SPDT - ADJUSTABLE ROD



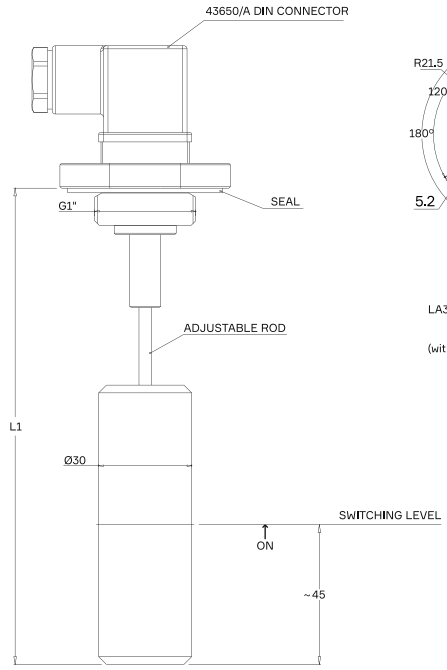



Connection holes

- Three holes lange - 120°
- Two holes lange - 180°
- 1" BSPP

Three types of connections in a single execution.

Electrical features

- Electrical connection in accordance with DIN 43650/A
- Electrical protection in accordance with DIN 40050 - IP 65
- Maximum electrical load NO/NC 30V AC/DC - 0.25 A
- Other electrical features on request.

Caratteristiche tecniche

- Max pressure: 5 bar
- Max luid viscosity: 150 cSt
- Fluid temperature: -10 ÷ 90 °C
- Adjustable rod

Materials

Rod Stainless Steel 316
Floater PA6
Housing Anodized Aluminum

Select specifications for product coding

1	**Rod Length L1 (mm)**	**050** 500	**100** 1000
2	**Customizations**	**.00** Standard	**.XX** Customized product

LA3	1.	2.	3.

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01