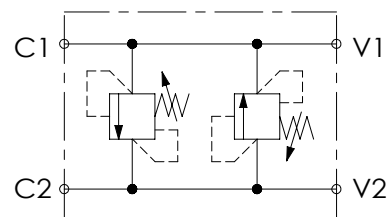
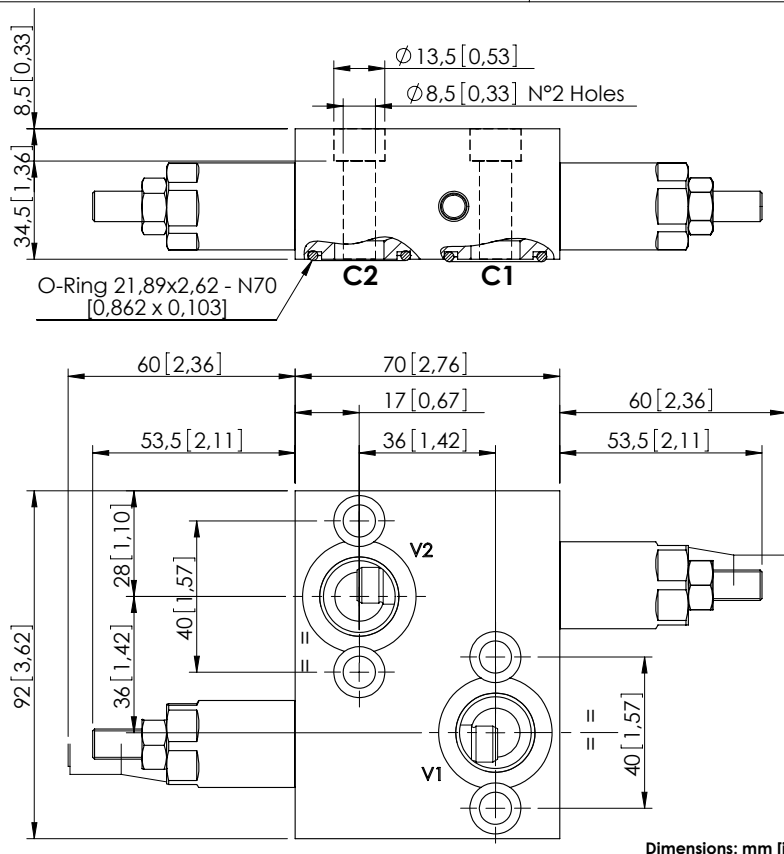


MADN-030-TBNR

DOUBLE ANTISHOCK

**SPECIFICATIONS**



Max. operating pressure:	210 bar (3000 psi)
Rated flow:	30 l/min (8 gpm)
Manifold:	Aluminium
Weight:	0,76 kg (1,68 lbs)
Contamination class to ISO 4406:	See technical spec.
MTTFa:	150 years

NOTES

Setting: at least 1.3 times the load induced pressure.

Designed for DANFOSS motors OMP-OMR series.

For other configurations/quick codes not available in this catalogue page please consult factory

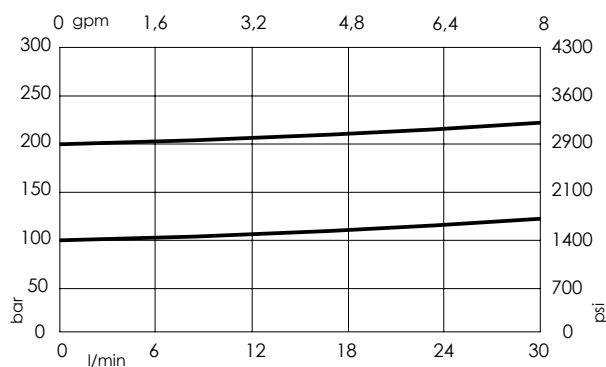SEALING CAPOrdering code:
AT000020**CURVES****ORDERING CODES**

Quick code	Description	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MA000012	MADN-030-TBNR-HN-G12-N210	V1,V2: G 1/2" C1,C2: $\varnothing 13$	200 bar (2900 psi)	50-210 bar (700-3000 psi)	42 bar/turn (600 psi/turn)
MA000022	MADN-030-TBNR-HN-G12-N100	V1,V2: G 1/2" C1,C2: $\varnothing 13$	100 bar (1400 psi)	30-100 bar (450-1400 psi)	20 bar/turn (300 psi/turn)