
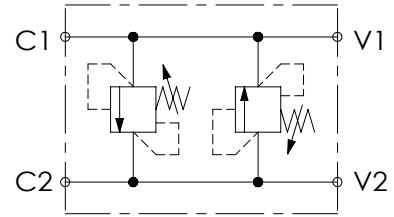


MADN-030-TBNR

DOUBLE ANTISHOCK

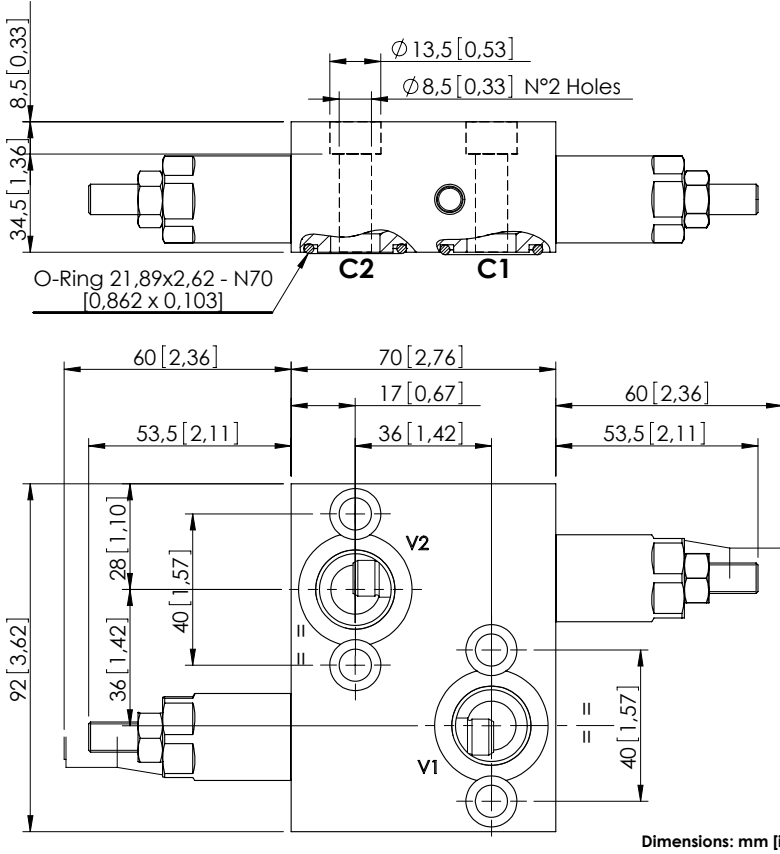

SPECIFICATIONS

Max. operating pressure:	210 bar (3000 psi)
Rated flow:	30 l/min (8 gpm)
Manifold:	Aluminium
Weight:	0,76 kg (1,68 lbs)
Contamination class to ISO 4406:	See technical spec.
MTTFa:	150 - 1200 years: See technical spec.

NOTES


Setting: at least 1.3 times the load induced pressure.
 Designed for DANFOSS motors OMP-OMR series.
 For other configurations/quick codes not available in this catalogue page please consult factory

SEALING CAP



Ordering code:
AT000020

CURVES

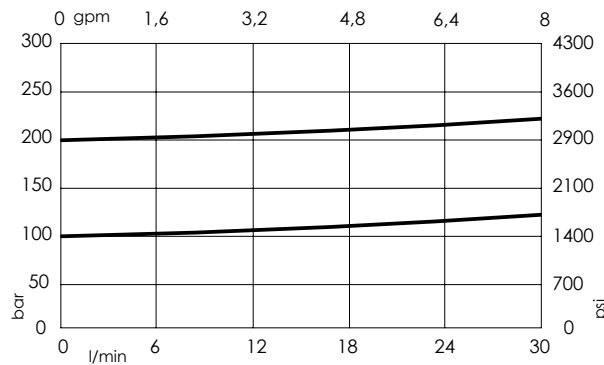

ORDERING CODES

Quick code	Description	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MA000012	MADN-030-TBNR-HN-G12-N210	V1,V2: G 1/2" C1,C2: Ø 13	200 bar (2900 psi)	50-210 bar (700-3000 psi)	42 bar/turn (600 psi/turn)
MA000022	MADN-030-TBNR-HN-G12-N100	V1,V2: G 1/2" C1,C2: Ø 13	100 bar (1400 psi)	30-100 bar (450-1400 psi)	20 bar/turn (300 psi/turn)