



REGENERATIVE VALVE

MRSN-150-ZLNV

REGENERATIVE

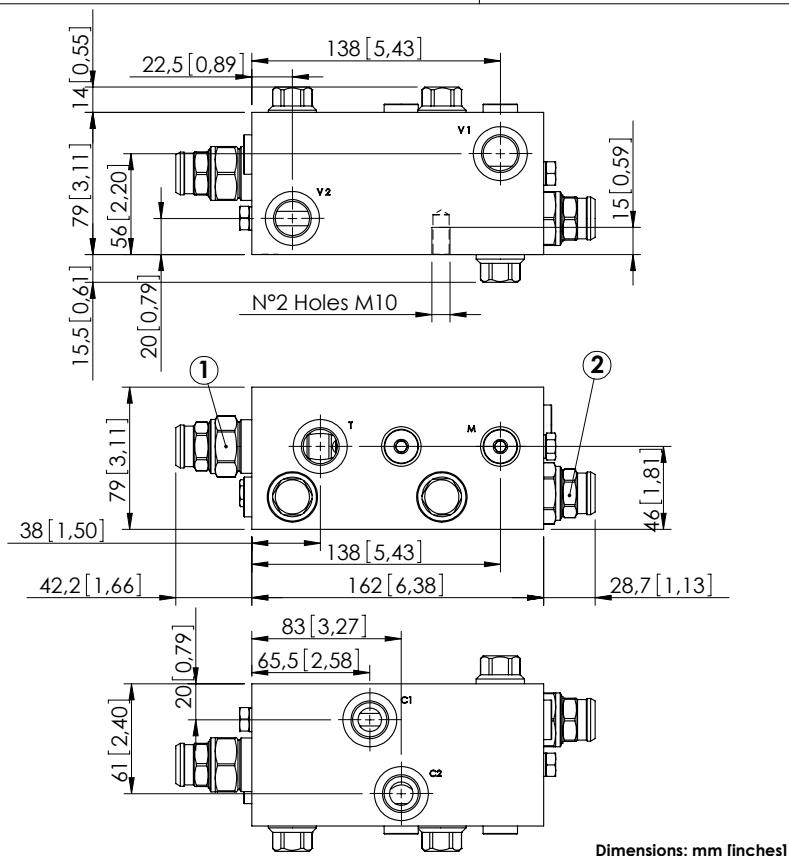

SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	150 l/min (40 gpm)
Manifold:	Aluminium
Weight:	3,18 kg (7,01 lbs)
Contamination class to ISO 4406:	See technical spec.
MTFa:	150 years


NOTES

Setting: at least 1.3 times the load induced pressure.

Designed for truck mounted cranes.

For other configurations/quick codes not available in this catalogue page please consult factory

CURVES

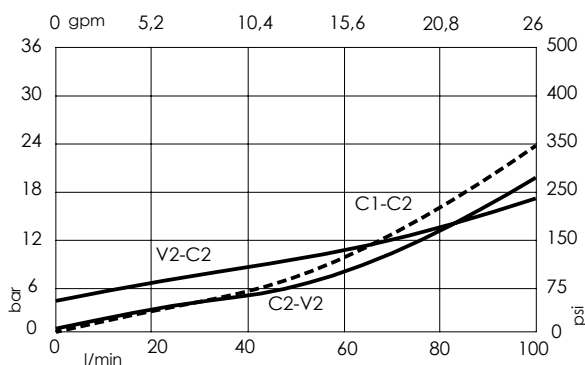

ORDERING CODES

Quick code	Description	Pilot ratio	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MB000113	MRSN-150-ZLNV-04-G12-N350	4:1	V1,V2,C1,C2,T: G1/2" M: G1/4"	350 bar (5000 psi)	100-350 bar (1400-5000 psi)	104 bar/turn (1500 psi/turn)