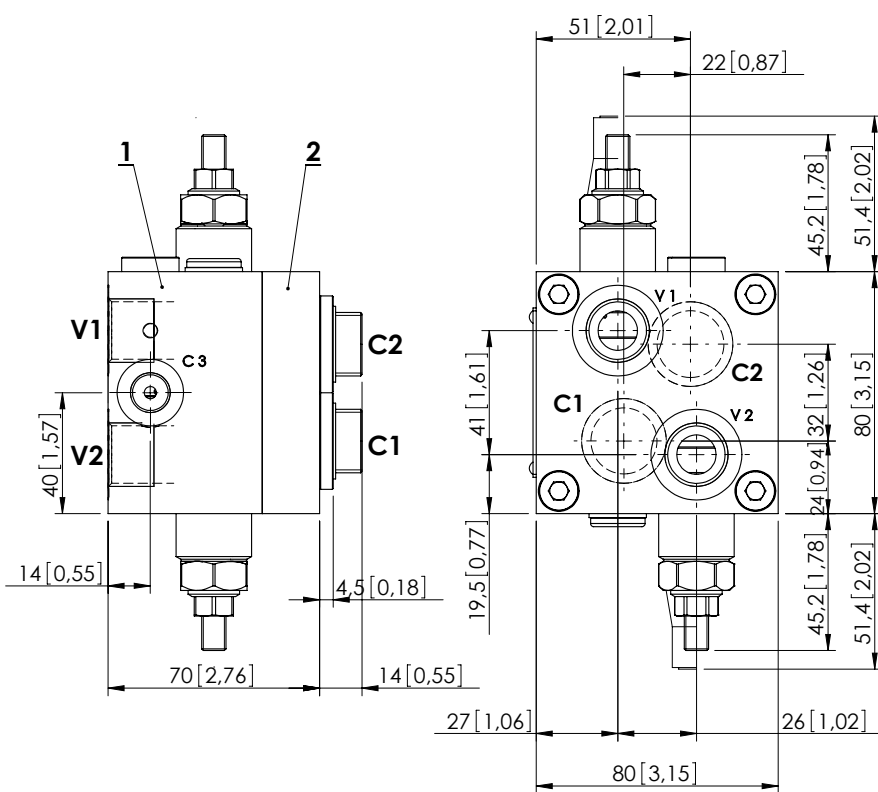
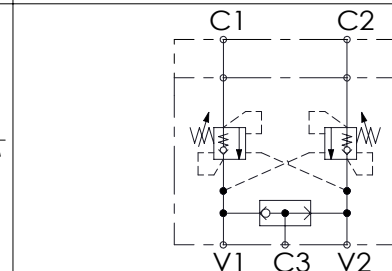


MBDN-060-AMSFOVERCENTRE
WITH BRAKE RELEASE

Dimensions: mm [inches]

**SPECIFICATIONS**

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	60 l/min (16 gpm)
Manifold:	Steel
Weight:	3,46 kg (7,63 lbs)
Contamination class to ISO 4406:	See technical spec.
MTFa:	150 years

NOTES

Setting: at least 1.3 times the load induced pressure.


Designed for SAM HYDRAULIC HR/OMS motors.

Valve composed by:

1.MB000619

2.MP000030

For other configurations/quick codes not available in this catalogue page please consult factory

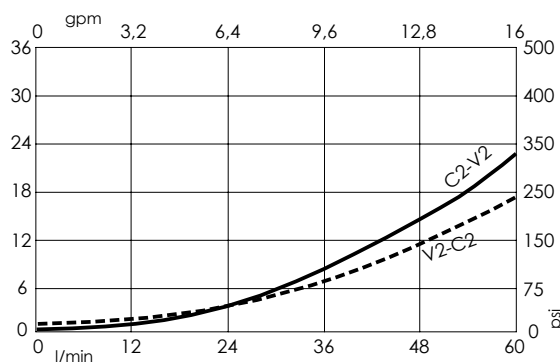SEALING CAPOrdering code:
AT000020**CURVES****ORDERING CODES**

Quick code	Description	Pilot ratio	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MB000319	MBDN-060-AMSF-04-G12-N200-SH HR	4,2:1	V1,V2: G 1/2" C1,C2: Sam Hydraulic HR /OMS C3: G 1/4"	200 bar (2900 psi)	60-210 bar (850-3000 psi)	62 bar/turn (900 psi/turn)