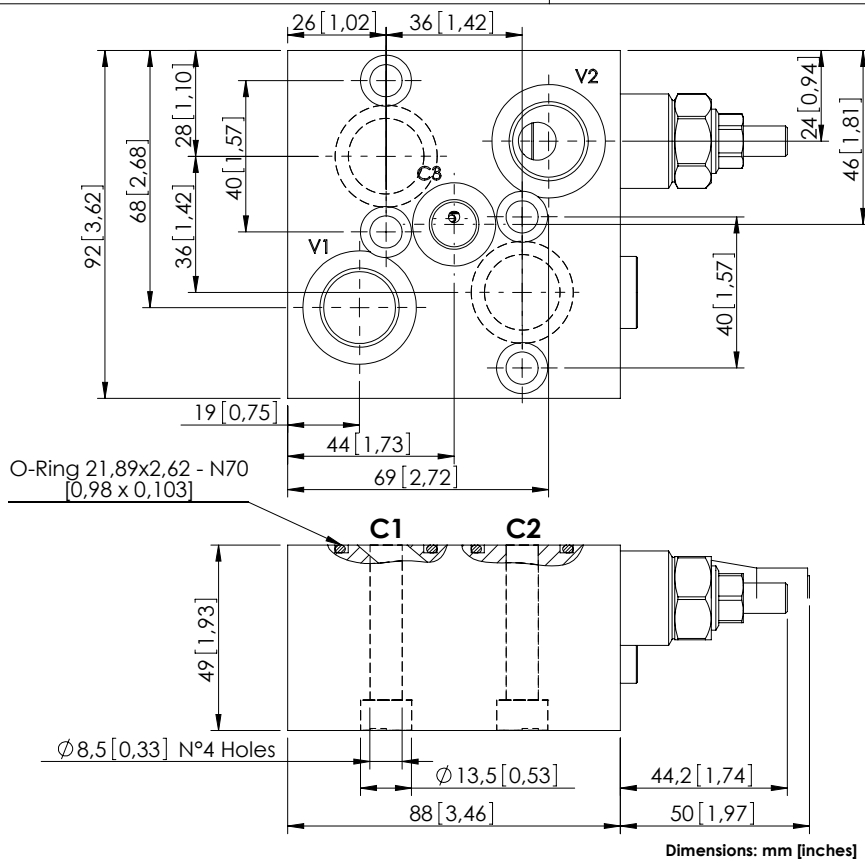


MBSN-060-ZMSFOVERCENTRE
WITH BRAKE RELEASE**SPECIFICATIONS**


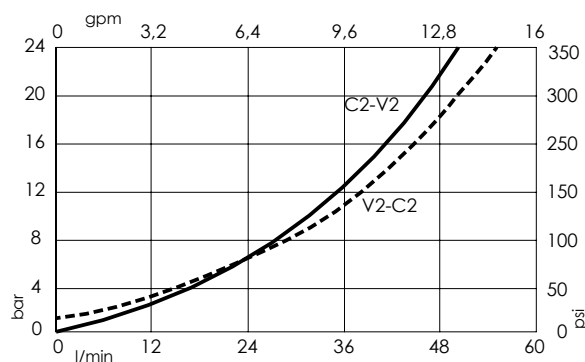
Max. operating pressure:	350 bar (5000 psi)
Rated flow:	60 l/min (16 gpm)
Manifold:	Aluminium
Weight:	1,09 kg (2,4 lbs)
Contamination class to ISO 4406:	See technical spec.
MTTFa:	150 years

NOTES

Setting: at least 1.3 times the load induced pressure.

Designed for DANFOSS motors OMP-OMR series.

For other configurations/quick codes not available in this catalogue page please consult factory

SEALING CAPOrdering code:
AT000020**CURVES****ORDERING CODES**

Quick code	Description	Pilot ratio	Main ports size	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MB000796	MBSN-060-ZMSF-04-G12-N350-NOMP	4,2:1	V1, V2: G1/2" C1, C2: OMP flange C3: G 1/4"	350 bar (5000 psi)	100-350 bar (1400-5000 psi)	139 bar/turn (2000 psi/turn)
MB000795	MBSN-060-ZMSF-04-G12-N200-NOMP	4,2:1	V1, V2: G1/2" C1, C2: OMP flange C3: G 1/4"	200 bar (2900 psi)	60-210 bar (850-3000 psi)	62 bar/turn (900 psi/turn)