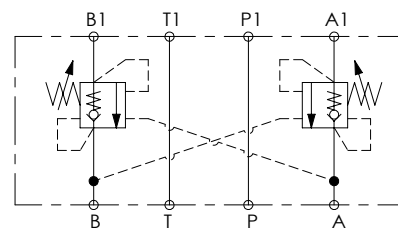
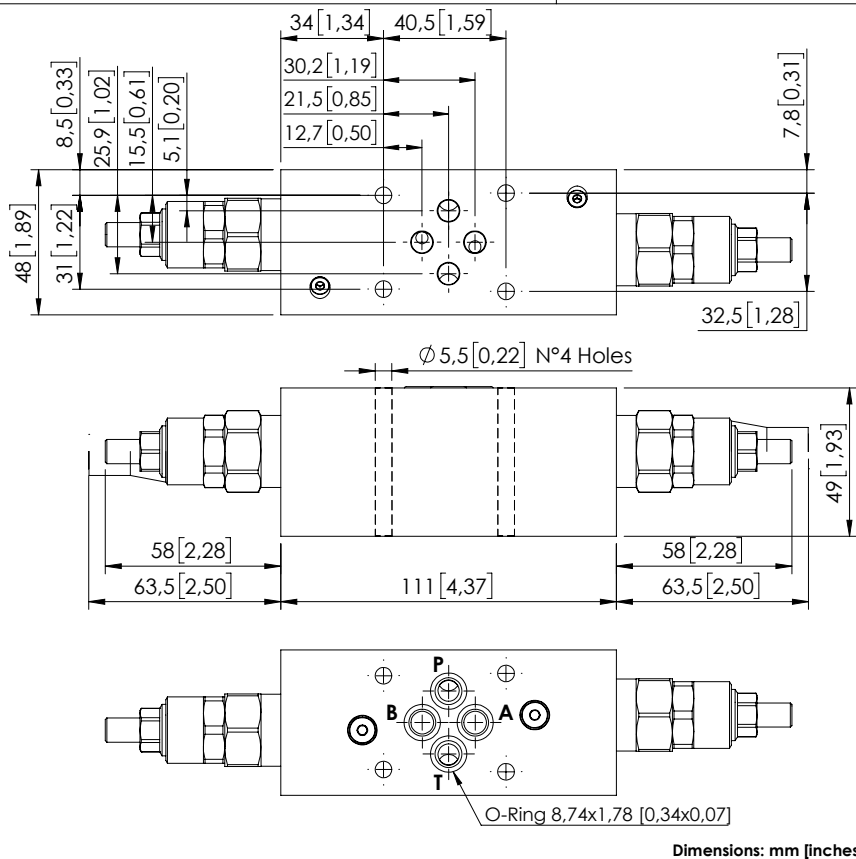



MBDN-030-LTNR**DOUBLE ACTING
CETOP 3****SPECIFICATIONS**

Max. operating pressure:	210 bar (3000 psi)
Rated flow:	30 l/min (8 gpm)
Manifold:	Aluminium
Weight:	1 kg (2,2 lbs)
Contamination class to ISO 4406:	See technical spec.
MTTFa:	150 years


NOTES

Setting: at least 1.3 times the load induced pressure.

For other configurations/quick codes not available in this catalogue page please consult factory

SEALING CAP

Ordering code:
AT000020

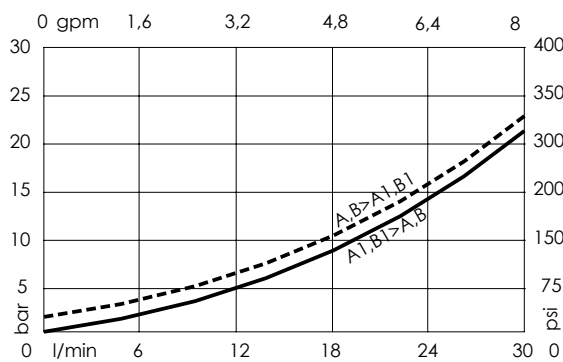CURVES**ORDERING CODES**

Quick code	Description	Pilot ratio	Ports	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase
MB000917	MBDN-030-LTNR-04-N06-N210	4:1	A,B,P,T: CETOP 3	200 bar (2900 psi)	70-210 bar (1000-3000 psi)	94 bar/turn (1300 psi/turn)