



PILOT OPERATED CHECK VALVE

# MCSN-060-TLNS

SINGLE ACTING

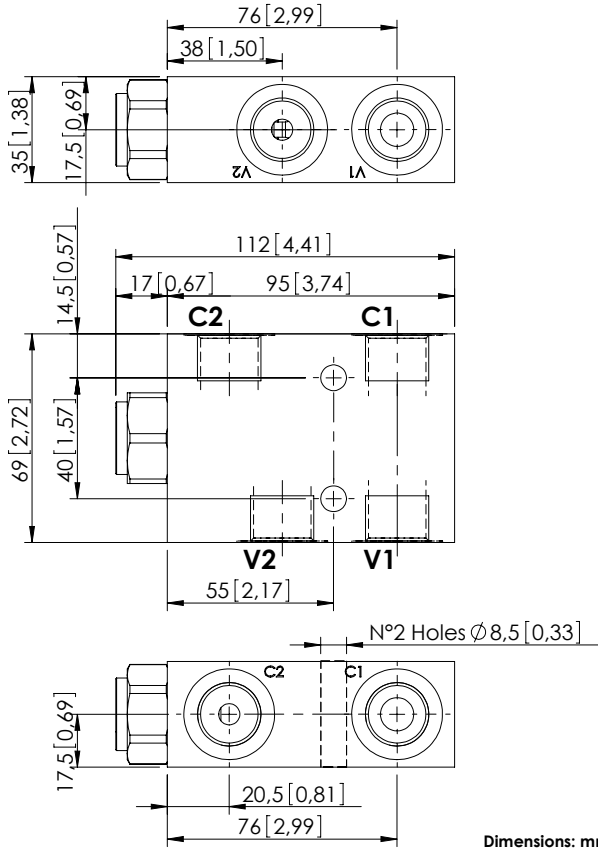


### SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	60 l/min (16 gpm)
Manifold:	Aluminium
Weight:	0,66 kg (1,46 lbs)
Contamination class to ISO 4406:	See technical spec.
MTTFa:	150 years

### NOTES

### CURVES

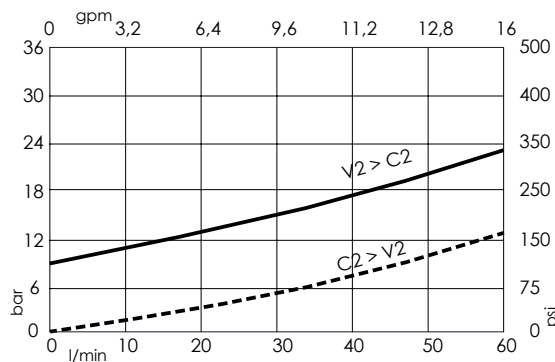

### ORDERING CODES

Quick code	Description	Main ports size	Pilot ratio	Cracking pressure	O-ring on pilot piston
MC000079	MCSN-060-TLNS-03-G12-N008	V1,V2,C1,C2 : G 1/2"	3:1	8 bar (100 psi)	NO
MC000076	MCSN-060-TLNC-03-G12-N008	V1,V2,C1,C2 : G 1/2"	3:1	8 bar (100 psi)	YES