
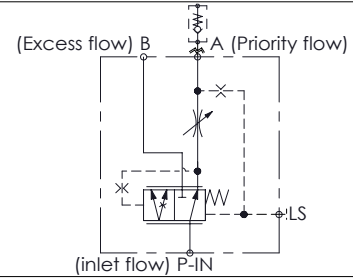


FLOW REGULATOR

MFPT-200-RHAR

PRESSURE COMPENSATED
PRIORITY

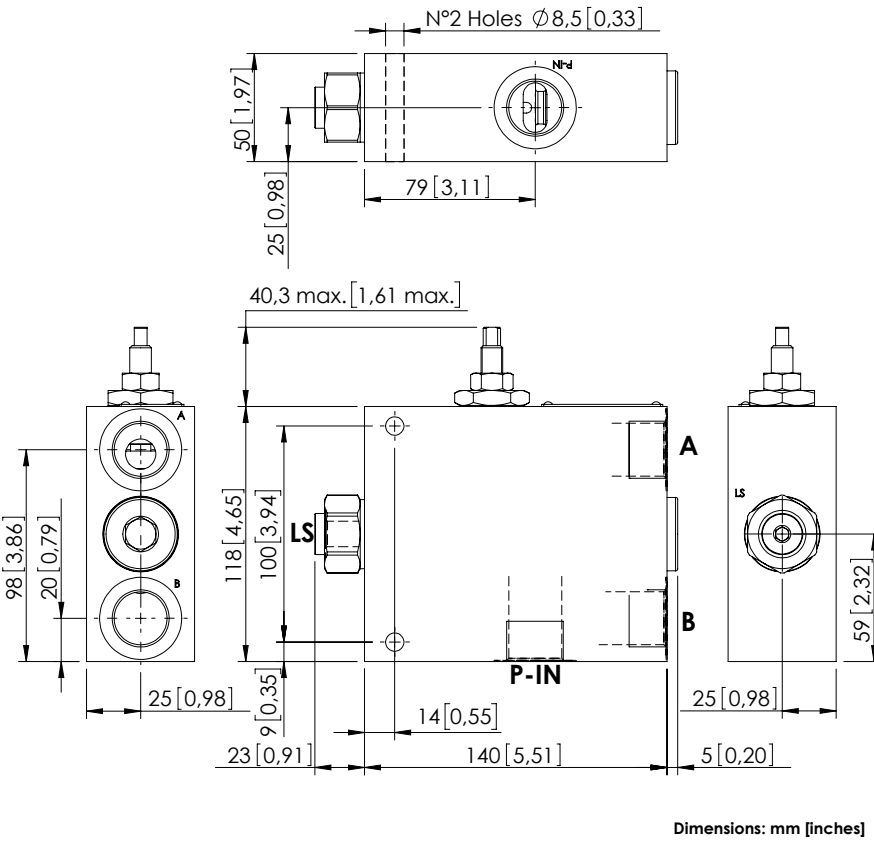

SPECIFICATIONS


Max. operating pressure:	350 bar (5000 psi)
Rated flow:	200 l/min (53 gpm)
Regulated flow:	1-140 l/min (0,3-37 gpm)
Manifold:	Steel
Weight:	5,85 kg (13 lbs)
Contamination class to ISO 4406:	See technical spec.
MTF _a :	150 - 1200 years: See technical spec.

NOTES

For options see pag. 22.00.000

For other configurations/quick codes not available in this catalogue page please consult factory


OPTIONS



Screw and locknut





Handknob and locknut



Graduated handknob

CURVES

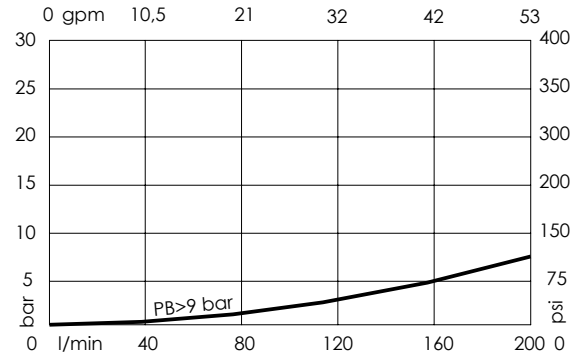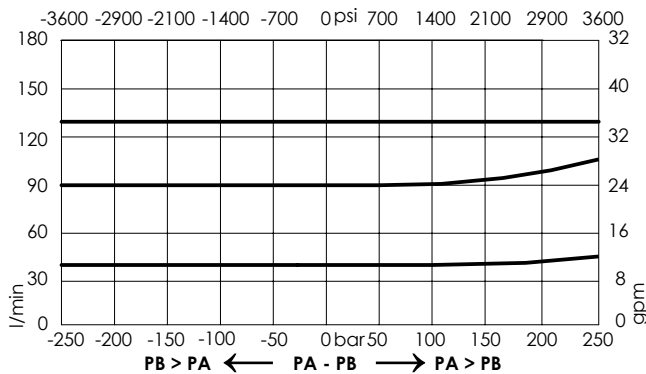

ORDERING CODES

Quick code	Description	Ports	Options
MF000141	MFPT-200-RHAR-14-G34-N350	P-IN,A,B: G 3/4" LS: G 1/4"	Screw and locknut