


Dimensions: mm [inches]




## SPECIFICATIONS

|                                  |                     |
|----------------------------------|---------------------|
| Max. operating pressure:         | See table           |
| Rated flow:                      | See table           |
| Weight:                          | 1,09 kg (2,38 lbs)  |
| Contamination class to ISO 4406: | See technical spec. |
| MTTFd:                           | 150 years           |

## NOTES


For other configurations/quick codes not available in this catalogue page please consult factory

## OPTIONS



Graduated handknob  
for flow regulation  
under pressure

## CURVES

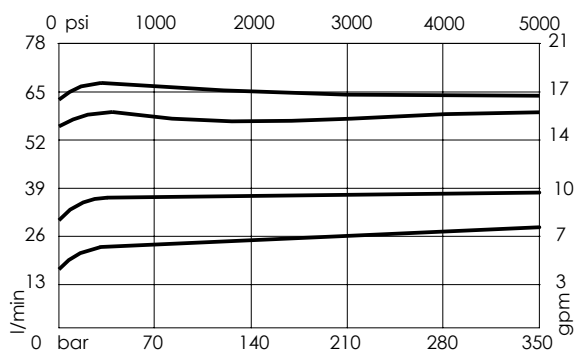

## ORDERING CODES

| Quick code | Description               | Ports       | Manifold  | Max. pressure      | Max. inlet flow   | Regulated flow range  | Options            |
|------------|---------------------------|-------------|-----------|--------------------|-------------------|-----------------------|--------------------|
| MF000186   | MFST-090-RPZR-06-G12-N210 | E,R: G 1/2" | Aluminium | 210 bar (3000 psi) | 90 l/min (24 gpm) | 0-6 l/min (0-1,5 gpm) | Graduated handknob |
| MF000187   | MFST-090-RPZR-12-G12-N210 | E,R: G 1/2" | Aluminium | 210 bar (3000 psi) | 90 l/min (24 gpm) | 0-12 l/min (0-3 gpm)  | Graduated handknob |
| MF000188   | MFST-090-RPZR-25-G12-N210 | E,R: G 1/2" | Aluminium | 210 bar (3000 psi) | 90 l/min (24 gpm) | 0-25 l/min (7 gpm)    | Graduated handknob |
| MF000189   | MFST-090-RPZR-32-G12-N210 | E,R: G 1/2" | Aluminium | 210 bar (3000 psi) | 90 l/min (24 gpm) | 0-32 l/min (0-9 gpm)  | Graduated handknob |
| MF000190   | MFST-090-RPZR-50-G12-N210 | E,R: G 1/2" | Aluminium | 210 bar (3000 psi) | 90 l/min (24 gpm) | 0-50 l/min (0-13 gpm) | Graduated handknob |
| MF000191   | MFST-090-RPZR-63-G12-N210 | E,R: G 1/2" | Aluminium | 210 bar (3000 psi) | 90 l/min (24 gpm) | 0-63 l/min (0-17 gpm) | Graduated handknob |