



PC3

PRESSURE SWITCH
SPDT - DIN CONNECTOR
≤ 250 V

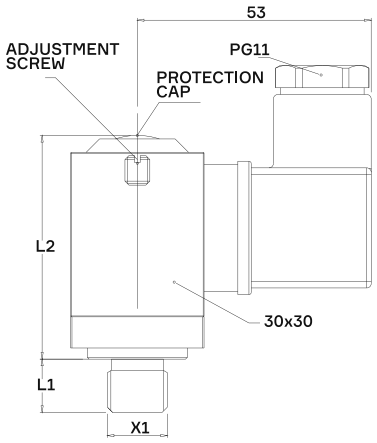

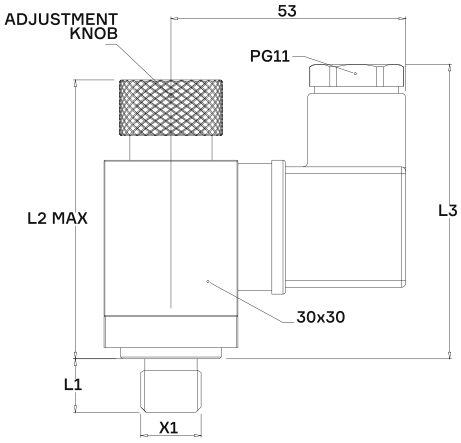







Overpressure limit	Brass - Diaphragm Steel - Piston	300 bar 600 bar	**Max Hysteresis**	Piston version Diaphragm version	15% of full scale value 10% of full scale value
Working pressure	Brass - Diaphragm Steel - Piston	180 bar 450 bar	**Standard protection level**	.E0 Connector DIN EN 175301-803-A (DIN43650/A) - IP65 ** See the attachment caps and connectors*	

L2 dimension	Piston version 55 mm Diaphragm version 51 mm
L2 MAX dimension	Piston version 69 mm Diaphragm version 65 mm
L3 dimension	Piston version 70 mm Diaphragm version 66 mm

Select specifications for product coding

1	**Setting Range**	**01** Diaphragm 0.3-1 Bar	**02** Diaphragm 0.5-2 Bar	**03** Diaphragm 1.5-10 Bar	**04** Diaphragm 9-20 Bar	**05** Diaphragm 15-50 Bar	**06** Diaphragm 40-80 Bar	**07** Diaphragm 50-100 Bar	**08** Piston 40-150 Bar	**09** Piston 100-250 Bar	**10** Piston 120-300 Bar
2	**Electrical Load**									**4** 12V/100mA Gold plated	**5** 250 Vac / 5A 48Vdc / 4A
3	**Electrical Condition**										**S** SPDT Contact
4	**Adjustement Option**									**V** Screw	**P** Knob
5	**Seals**							**H** HNBR	**E** EPDM	**S** MVQ (silicone)	**V** FKM
6	**Threads (X1)**							**00** 1/8"BSPT *L1 10 mm*	**01** 1/4"BSPT *L1 12 mm*	**10** 1/8"BSPP *L1 10 mm*	**11** 1/4"BSPP *L1 12 mm*
7	**Customizations** ** See the attachment caps and connectors*					**.E0** DIN connector EN 175301-803-A (DIN43650/A) - IP65			**.L0** LED connector DIN EN 175301-803-A (DIN43650/A) - IP65		**.XX** Costumized product
8	**Adjustments (bar)**									**S** Rising setup	**D** Falling setup

PC3	1.	2.	3.	4.	5.	6.	7.	8.	9.

ATLANTIC
Fluid Tech

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Release 01