

PE3

ELECTRICAL DIFFERENTIAL PRESSURE INDICATOR
MAGENTIC DRIVE -SPST

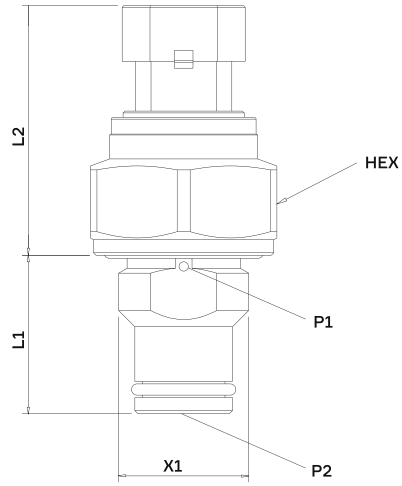


CONFIGURATION
NORMALLY OPEN



A (P1-P2) ≥ ΔP
B (P2-P1) ≥ ΔP

CONFIGURATION
NORMALLY CLOSED



A (P1-P2) ≥ ΔP
B (P2-P1) ≥ ΔP



Overpressure limit	600 bar	**Fluid type**	Oil	**Standard protection level**	AMP Superseal Connection - 15 2 ways-IP67 ** See the attachment caps and connectors*
Working pressure	450 bar	**Operating temperature**	-30°C + 120°C	**L2 Dimension**	Config/.S0 45 mm Config/.D0 50 mm Config/.J0 45 mm
		Drive Type	Magnetic		

Select specifications for product coding

1	**Working Logic**									**A** (P1-P2)	**B** (P2-P1)
2	**Threads (X1)** **L1 value customizable*									**09** 1/2" BSPP *L1 25.5 mm*	**35** M20x1.5 *L1 25.5 mm*
3	**Electrical Load**									**4** 12V / 50mA Gold plated	**5** 48Vdc / 4 A
4	**Electrical Condition**									**A** Normally Open	**C** Normally Closed
5	**Housing Material**									**A** Alluminum	**B** Brass
6	**Seals**									**N** NBR	**V** FKM
7	**Customizations** ** See the attachment caps and connectors*								**.S0** AMP Superseal Connector 1.5 2 ways - IP67	**.D0** Deutsch Connector DT04 - 2P - IP67	**.J0** AMP Junior Power Connection Time - IP65	**.XX** Customized product
8	**Adjustments (bar)**								**1.3** ±15%	**2** ±10%	**2.5** ±10%	**3** ±10%	**5** ±10%	**8** ±10%

PE3	1.	2.	3.	4.	5.	6.	7.	8.	9.	A.

ATLANTIC Fluid Tech

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01