


PE5

ELECTRICAL DIFFERENTIAL PRESSURE INDICATOR
MAGENTIC DRIVE -SPDT

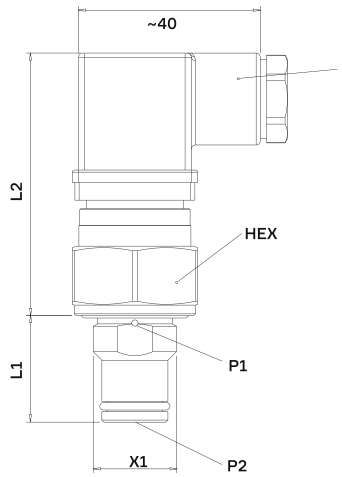



ELECTRICAL CONDITION



A (P1-P2)≥ΔP

B (P2-P1)≥ΔP



Overpressure limit	600 bar	**Fluid type**	Oil	**Standard protection level**	Connection DIN EN 175301-803-A (DIN43650/A) - IP65 ** See the attachment caps and connectors*
Working pressure	450 bar	**Operating temperature**	-30°C + 120°C	**L2 Dimension**	Config/.E0 66 mm Config/.L0 66 mm
		Drive Type	Magnetic		

Select specifications for product coding

1	**Working Logic**								**A** (P1-P2)	**B** (P2-P1)	
2	**Threads (X1)** **L1 value customizable*								**09** 1/2" BSPP *L1 25.5 mm*	**35** M20x1.5 *L1 25.5 mm*	
3	**Electrical Load**								**4** 12V / 50mA Gold plated	**5** 48Vdc / 4 A	
4	**Electrical Condition**									**S** SPDT	
5	**Housing Material**								**A** Alluminum	**B** Brass	
6	**Seals**								**N** NBR	**V** FKM	
7	**Customizations** ** See the attachment caps and connectors*								**.E0** DIN Connector EN 175301-803-A (DIN43650/A) - IP65	**.L0** LED DIN Connector EN 175301-803-A (DIN43650/A) - IP65	**.XX** Customized product
8	**Adjustments (bar)**								**1.3** ±15%	**2** ±10%	**2.5** ±10%	**3** ±10%	**5** ±10%	**8** ±10%

PE5	1.	2.	3.	4.	5.	6.	7.	8.	9.	A.

ATLANTIC Fluid Tech

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01