


PR3I

FIXED SETTIN PRESSURE SWITCH
SPST - ISOLATED
≤ 48 V

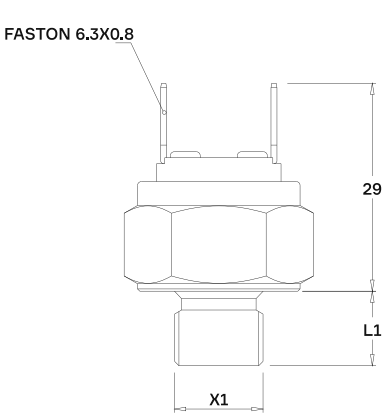




CONFIGURATION
NORMALLY CLOSED



CONFIGURATION
NORMALLY OPEN





Overpressure limit	Brass - Diaphragm	20 bar	
	Steel - Diaphragm	20 bar	
Working pressure	Brass - Diaphragm	10 bar	
	Steel - Diapragh	15 bar	

Operating temperature	** See the guide to selection of diaphragms / seals*	
Max Hysteresis	Diaphragm version	10% of full scale value

Standard protection level .F0 Faston Connection - IP00 ** See the attachment caps and connectors*

Select specifications for product coding

1	**Setting Range**	**01** Diaphragm 0.2-0.5 Bar	**02** Diaphragm 0.5-2 Bar	**03** Diaphragm 2-4 Bar	**04** Diaphragm 3-6 Bar	**05** Diaphragm 5-8 Bar	
2	**Electrical Load**					**5** 48V / 0.5 A	
3	**Electrical Condition**				**A** Normally Open	**C** Normally Closed	
4	**Housing Material**				**B** Brass	**Z** Galvanized Steel	
5	**Seals**					**N** NBR	
6	**Threads (X1)**	**20** M10x1 *L1 10 mm*		**21** M10x1K *L1 10 mm*	**23** M12x1.5 *L1 12 mm*	**23A** M12x1.75 *L1 12 mm*	
7	**Customizations** ** See the attachment caps and connectors*				**.F0** Faston Connection IP00	**.XX** Customized product	

PR3I	1.	2.	3.	4.	5.	6.	7.	8.

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Release 01