

TF1

BIMETAL THERMOSTAT
SPST - FASTON
EARTH RETURN



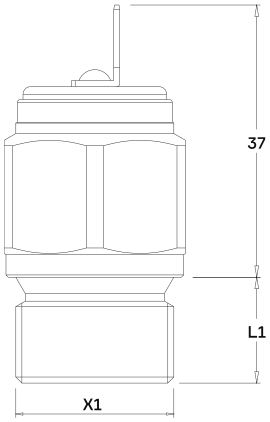

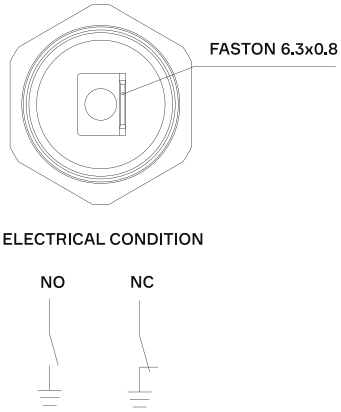

Max Pressure	250 bar	Intervention Tolerance	± 3.5	Thightening Torque	25 Nm
Electrical Load Type	48V / 4A 24V / 6A	Thermal Hysteresis	< 14 °C	Housing Material	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			Standard protection level	.F0 Faston Connection - IP00 ** See the attachment caps and connectors*

Select specifications for product coding

1 Threads (X1)

09	12	25
1/2" BSPP *L1 13,5 mm*	3/8" BSPP *L1 13.5 mm*	M22x 1.5 *L1 13.5 mm*

2 Switching Temperature

030	040	050	060	070	080	090	100	110	120
30° C	40° C	50° C	60° C	70° C	80° C	90° C	100° C	110° C	120° C

3 Electrical Condition

A	C
Normally Open	Normally Closed

4 Switching

S	D
Rising Setup	Falling Setup

5 Customizations
** See the attachment caps and connectors*

.F0	.01	.XX
Faston Connection IP00	Protection cap KT011 - IP54	Customized product

TF1	1.	2.	3.	4.	5.	6.

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01