

TF3

BIMETAL THERMOSTAT
WIRED : SPST



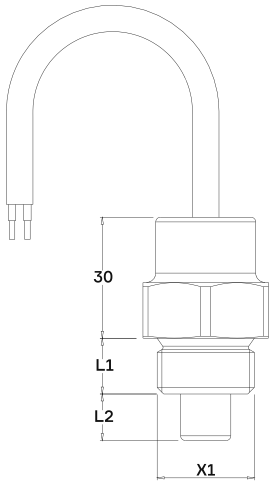

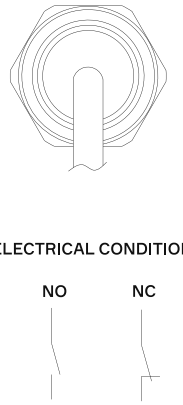

Max Pressure	250 bar	**Intervention Tolerance**	± 3.5	**Thightening Torque**	25 Nm
Electrical Load Type	48V / 1A 24V / 2A 250Vac / 1A	**Thermal Hysteresis**	< 14 °C	**Housing Material**	Brass Hex 24mm
Fluid Temperature	-40 ÷ +150 °C			**Standard protection level**	.96 Cable 2 x 0.75 - IP67 ** See the attachment caps and connectors*

Select specifications for product coding

1	**Threads (X1)**								**09** 1/2" BSPP *L1 13,5 mm*	**12** 3/8" BSPP *L1 13.5 mm*	**25** M22x 1.5 *L1 13.5 mm*
2	**Switching Temperature**	**030** 30° C	**040** 40° C	**050** 50° C	**060** 60° C	**070** 70° C	**080** 80° C	**090** 90° C	**100** 100° C	**110** 110° C	**120** 120° C
3	**Electrical Condition**									**A** Normally Open	**C** Normally Closed
4	**Switching**									**S** Rising Setup	**D** Falling Setup
5	**Probe Lenght (L2)**									**1** Probe 15 mm	**2** Probe 25.4 mm
6	**Cable Type**									**F** Flying Leads	**C** Cable 2 x 0.75
7	**Customizations** ** See the attachment caps and connectors*	**.96** Cable 2 x 0.75 L 250 mm - IP67	**.97** Cable L 250 mm Conn. AMP Superseal 1.5 2 ways - IP67	**.98** Cable L 250 mm Conn. Deutsch DT04-2P - IP67	**.99** Cable L 250 mm Conn. Metri-Pack (MP280) - IP67	**.F0** Faston Connection IP00	**.01** Protection cap KT011 - IP54	**.XX** Customized product			

TF3	1.	2.	3.	4.	5.	6.	7.	8.	A.

ATLANTIC Fluid Tech

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01