
TS1

SOFT STARTER
ELECTRONIC THERMOSTAT



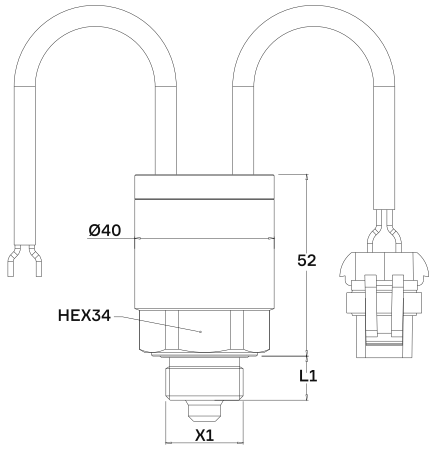

Max Pressure	200 bar	Fluid Temperature	-20 ÷ +90 °C	Housing Material	Brass
Supply Voltage	12 ÷ 24 Vdc	Intervention Tolerance	± 3.5	Supply Connection	cable 1.00 m
Max Load	20 A	Tightening Torque	25 Nm	Load Connection	See point **6** customization options
Output Signal	PWM				

Select specifications for product coding

1 **Threads (X1)**

09	12	25
1/2" BSPP *L1 13,5 mm*	3/8" BSPP *L1 13.5 mm*	M22x 1.5 *L1 13.5 mm*

2 **Switch-on Temperature (°C)**

030	040	050	060	070	080	090
30° C	40° C	50° C	60° C	70° C	80° C	90° C

3 **Switch-off Temperature (°C)**

030	040	050	060	070	080	090
30° C	40° C	50° C	60° C	70° C	80° C	90° C

4 **Transition Time (Seconds)**

A	B	C
15	30	60

5 **Electrical Condition**

A	C
Normally Open	Normally Closed

6 **Customizations**
** See the attachment caps and connectors*

.97	.98	.99	.XX
Cable L 250 mm Conn. AMP Superseal 1.5 2 ways - IP67	Cable L 250 mm Conn. Deutsch DT04-2P - IP67	Cable L 250 mm Conn. Metri-Pack (MP280) - IP67	Customized product

INFORMATION:

ELECTRONIC THERMOSTAT IDEAL FOR CONTROLLING THE ROTATION OF COOLING FANS ALLOWING IGNITION AND SWITCHIN OFF WITH “SOFT START” FUNCTION.

TS1	1.	2.	3.	4.	5.	6.	7.

ATLANTIC Fluid Tech

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01