


VR5

VACUUM SWITCH
SPST - FASTON
≤ 48 V

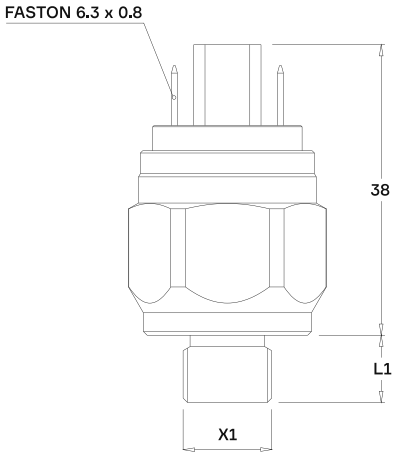




CONFIGURATION
NORMALLY CLOSED



CONFIGURATION
NORMALLY OPEN





Overpressure limit	Brass - Diaphragm	15 bar	
	Steel - Diaphragm	15 bar	
Working pressure	Brass - Diaphragm	10 bar	
	Steel - Diapragh	10 bar	

Operating temperature	** See the guide to selection of diaphragms / seals*	
Max Hysteresis	Diaphragm conf.	10% of full scale value

Standard protection level .F0 Faston Connection - IP00 ** See the attachment caps and connectors*

Select specifications for product coding

1 Setting Range

01	02
Diaphragm -100 : -500	Diaphragm -500 : -900

2 Electrical Load

4	5
12V / 50mA Gold plated	48Vdc / 0.5 A

3 Electrical Condition

A	C
Normally Open	Normally Closed

4 Housing Material

B	Z	I	W
Brass	Galvanized Steel	Stainless Steel 303	Stainless Steel 316

5 Seals

H	E	S	V	I
HNBR	EPDM	MVQ (silicone)	FKM	Stainless Steel Diaphragm

6 Threads (X1)

00	01	10	11	20	21	23	40	41
1/8"BSPT *L1 10 mm*	1/4"BSPT *L1 12 mm*	1/8"BSPP *L1 10 mm*	1/4"BSPP *L1 12 mm*	M10x1 *L1 10 mm*	M10x1K *L1 10 mm*	M12x1.5 *L1 12 mm*	1/8" - 27NPT *L1 10 mm*	1/8" - 18NPT *L1 12 mm*

7 Customizations
** See the attachment caps and connectors*

.F0	.01	.02	.XX
Faston connection IP00	Protection Cap KT011 - IP54	Protection Cap KT02 - IP65	Customized product

8 Adjustments (bar)

S	D
Rising setup	Falling setup

VR5	1.	2.	3.	4.	5.	6.	7.	8.	9.	A.

Atlantic Fluid Tech s.r.l.
via della Meccanica, 50
41018 San Cesario s/P (MO), Italy

www.atlanticfluidtech.com
info@atlanticfluidtech.com
T (+39) 059 5185400

Version 01