



CDFN-010-PSNC

MONO DIRECTIONAL
NOT COMPENSATED

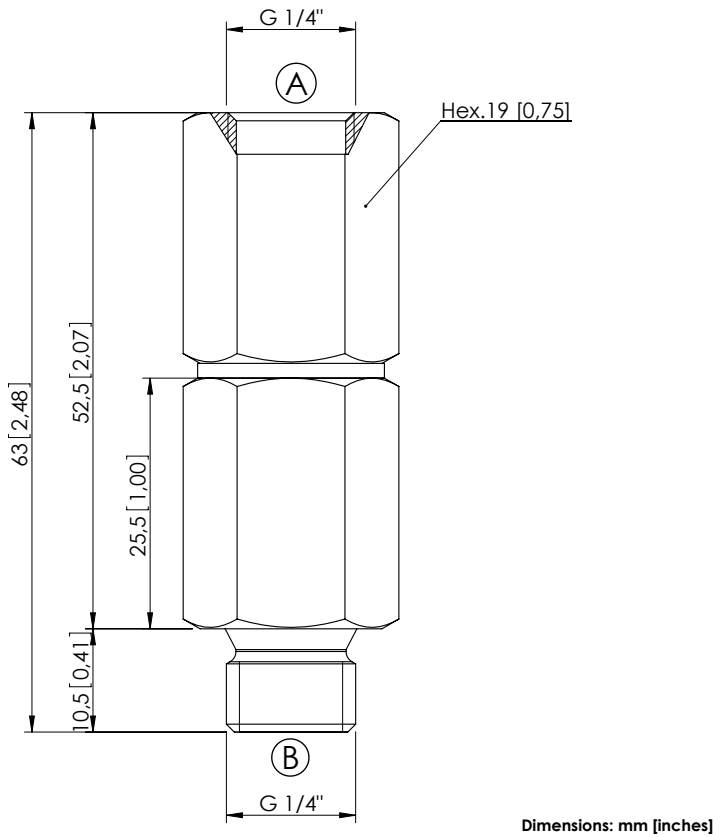


SPECIFICATIONS

| | |
|----------------------------------|---------------------|
| Max. operating pressure: | 350 bar (5000 psi) |
| Rated flow (A to B): | 10 l/min (3 gpm) |
| Material: | Steel |
| Weight: | 0,11 kg (0,24 lbs) |
| Contamination class to ISO 4406: | See technical spec. |
| MTTFa: | 150 years |

NOTES

CURVES

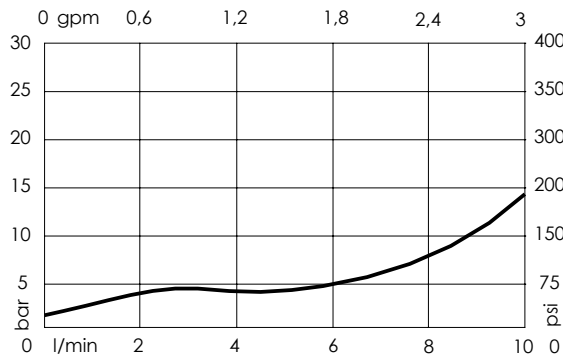

| Quick code | Description | Cracking Pressure | Ports | Ø Hole |
|------------|---------------------------|-------------------|-------------|-------------------------------------|
| CD000084 | CDFN-010-PSNC-05-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 0,5 mm (0,019 inch) |
| CD000085 | CDFN-010-PSNC-06-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 0,6 [0,023] |
| CD000086 | CDFN-010-PSNC-07-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 0,7 [0,027] |
| CD000087 | CDFN-010-PSNC-08-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 0,8 [0,031] |
| CD000089 | CDFN-010-PSNC-10-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 1 [0,039] |
| CD000091 | CDFN-010-PSNC-13-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 1,3 [0,051] |
| CD000167 | CDFN-010-PSNC-03-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 0,5 & wire 0,4 [0,019 & wire 0,016] |
| CD000168 | CDFN-010-PSNC-04-G14-N350 | 5 bar (75 psi) | A,B: G 1/4" | 0,6 & wire 0,4 [0,023 & wire 0,016] |