



CFSN-070-BHRR

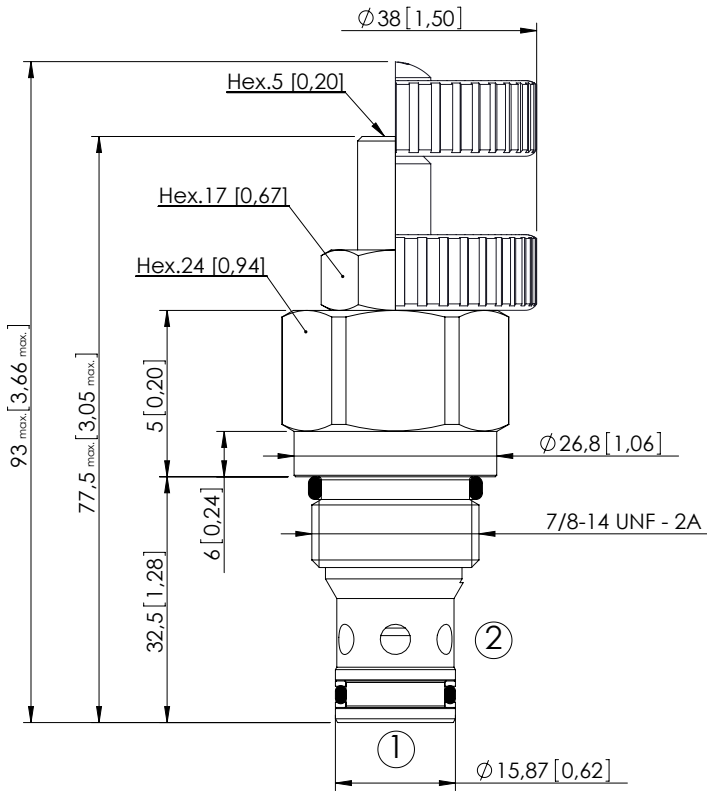

Dimensions: mm [inches]




SPECIFICATIONS

| | |
|----------------------------------|----------------------------|
| Max. operating pressure: | 350 bar (5000 psi) |
| Rated flow: | 70 l/min (19 gpm) |
| Cavity: | SAE 10 2N |
| Weight: | 0,17 kg (0,37 lbs) |
| Seal kit: | RB700082 |
| Installation torque: | 55 - 62 Nm (41 - 46 ft-lb) |
| Contamination class to ISO 4406: | See technical spec. |
| MTF _d : | 150 years |

NOTES

OPTIONS




Screw and locknut



Handknob and locknut

CURVES

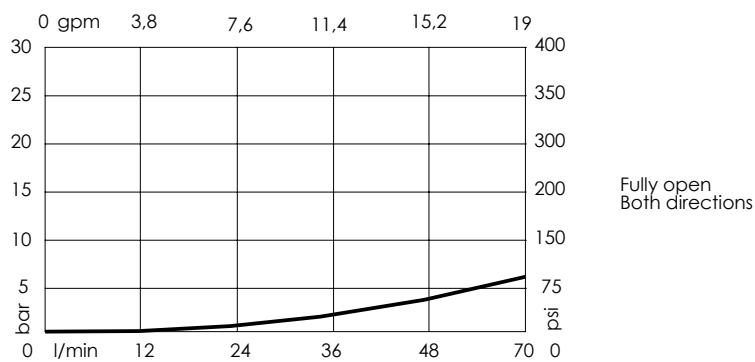

Fully open
Both directions

ORDERING CODES

| Quick code | Description | Options |
|------------|---------------------------|----------------------|
| CF000136 | CFSN-070-BHRR-NP-S10-N350 | Screw and locknut |
| CF000116 | CFSN-070-BVRR-NP-S10-N350 | Handknob and locknut |
| | | |
| | | |
| | | |
| | | |