





UNLOADING VALVE

MFTS-200-DHAN

**SOLENOID OPERATED
UNLOADING VALVE
WITH RELIEF**

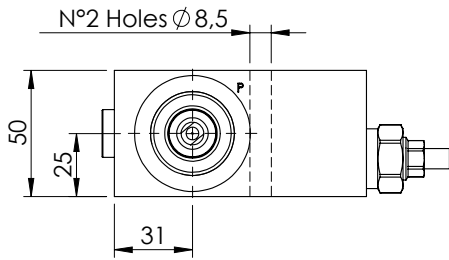

M7 coil type to be ordered separately

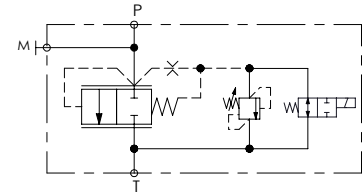
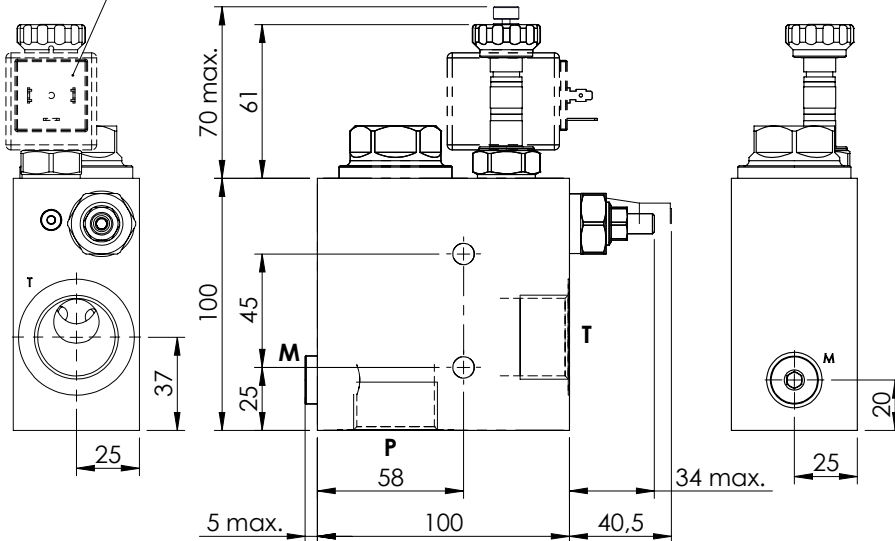


SPECIFICATIONS

Max. operating pressure:	350 bar
Rated flow:	200 l/min
Manifold:	Steel
Weight:	3,57 kg

SEALING CAP


Ordering code:
AT000020

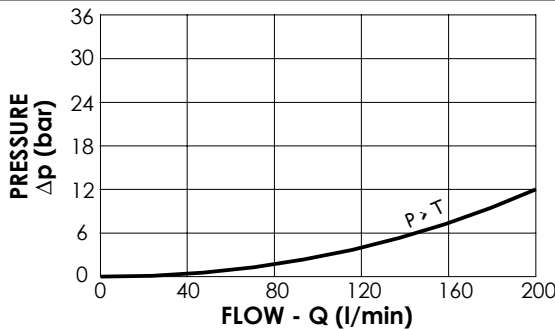


NOTES

See chapter 18.00.000 for coil.

OPTIONS



Standard



Push style override

ORDERING CODES

Quick code	Description	Ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)	Options
MF000083	MFTS-200-DHAN-NP-G10-N350	P,T:G 1" M:G 1/4"	350	140-350	142	Standard
MF000103	MFTS-200-DHAE-NP-G10-N350	P,T:G 1" M:G 1/4"	350	140-350	142	Push style override