
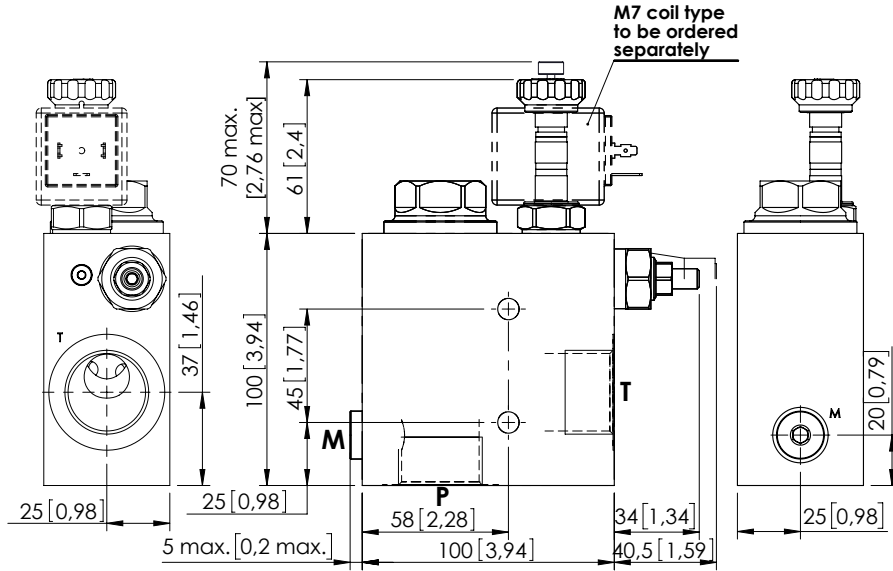



UNLOADING VALVE

# MFTS-200-DHAN

SOLENOID OPERATED  
UNLOADING VALVE  
WITH RELIEF

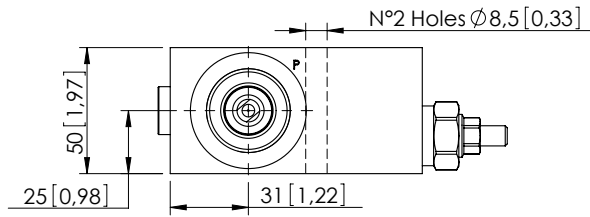

Dimensions: mm [inches]

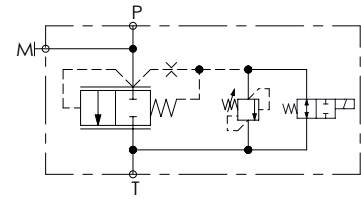

## SPECIFICATIONS

Max. operating pressure:	350 bar (5000 psi)
Rated flow:	200 l/min (53 gpm)
Manifold:	Steel
Weight:	3,57 kg (7,8 lbs)
Coil type:	M7
Contamination class to ISO 4406:	See technical spec.
MTTF <sub>a</sub> :	150 years

## NOTES

Available in steel version for 350 bar (5000 psi) maximum operating pressure.  
See chapter 18.00.000 for coil.

## CURVES

## OPTIONS


Standard




Push style override



## SEALING CAP



Ordering code:  
AT000020

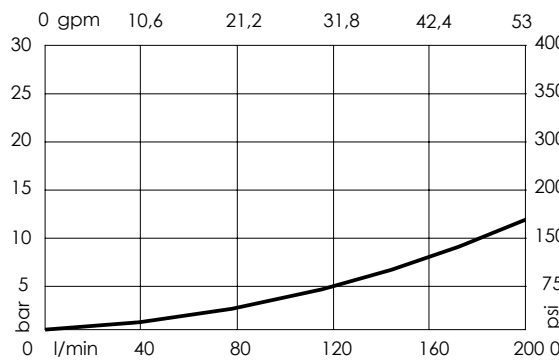

## ORDERING CODES

Quick code	Description	Ports	Standard setting Q=5 l/min (1,3 gpm)	Adjustment range	Pressure increase	Options
MF000083	MFTS-200-DHAN-NP-G10-N350	P,T: G 1" M: G 1/4"	350 bar (5000 psi)	140-350 bar (2000-5000 psi)	142 bar/turn (2000 psi/turn)	Standard
MF000103	MFTS-200-DHAE-NP-G10-N350	P,T: G 1" M: G 1/4"	350 bar (5000 psi)	140-350 bar (2000-5000 psi)	142 bar/turn (2000 psi/turn)	Push style override