
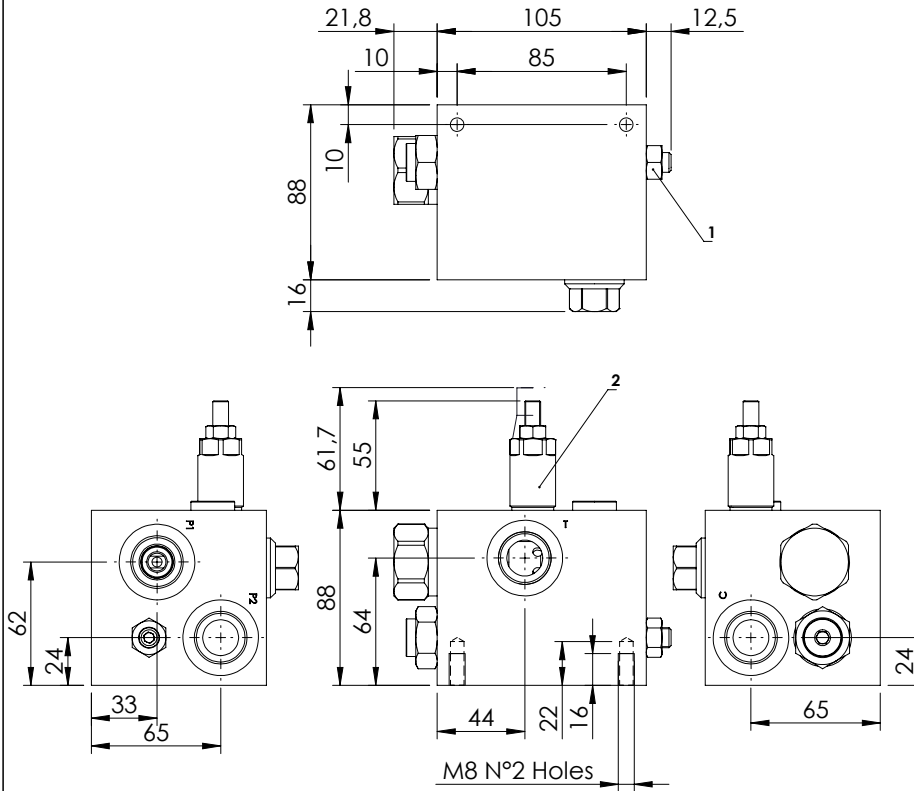
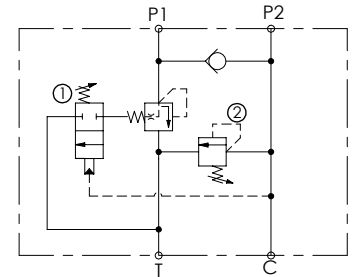


UNLOADING VALVE

MTSD-150-TLSN





SPECIFICATIONS

| | |
|--------------------------|---------------------------------|
| Max. operating pressure: | 300 bar |
| Rated flow: | 150 l/min |
| Manifold: | See table |
| Weight: | Aluminium 2,54 kg; Steel 5,9 kg |

SEALING CAP

Ordering code:
AT000020

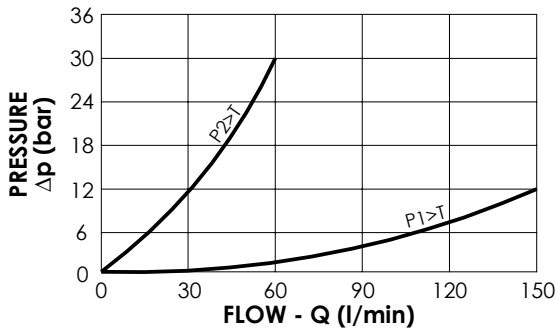

NOTES

ORDERING CODES

| Quick code | Description | Manifold material | Main ports size | Standard setting (bar, Q=5 l/min) | Adjust. range (bar) | Pressure increase (bar/turn) |
|------------|---------------------------|-------------------|------------------|-----------------------------------|-----------------------|------------------------------|
| MT000012 | MTSD-150-TLSN-00-G34-N300 | Aluminium | P1,P2,C,T: G3/4" | ① 50 ② 300 | ① 15-100 ② 100-350 | ① 23 ② 91 |
| MT000016 | MTSD-150-SLSN-00-G34-N300 | Steel | P1,P2,C,T: G3/4" | ① 50 ② 300 | ① 15-100 ② 100-350 | ① 23 ② 91 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |