

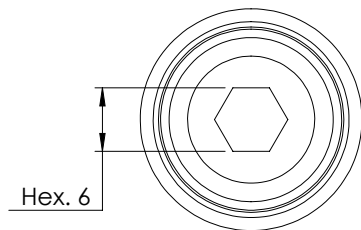
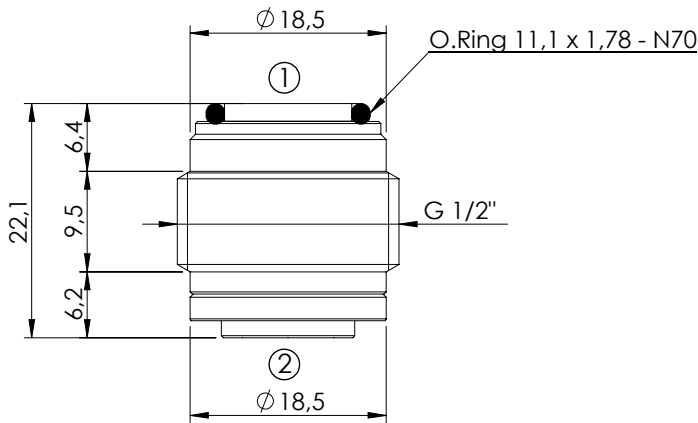


CHECK VALVE

CDVN-050-SSNS

**BIDIRECTIONAL
SPHERE TYPE**

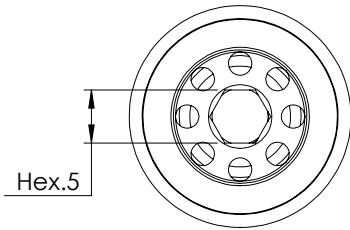


SPECIFICATIONS

Max. operating pressure:	350 bar
Rated flow:	50 l/min
Cavity:	VP000158
Weight:	0,04 kg

NOTES

Installation torque: 25 Nm
 Bidirectional installations.
 Fit O-Ring to side first inserted in cavity.

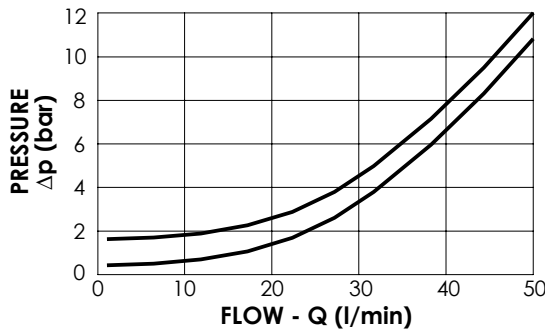

ORDERING CODES

Quick code	Description	Cracking pressure (bar)	
CD000098	CDVN-050-SSNS-FN-158-N002	1,5	
CD000059	CDVN-050-SSNS-FN-158-N000	0	