OVERCENTRE VALVE

MBDP-060-ZLDE

DOUBLE ACTING RELIEF COMPENSATED

ATLANTIC Fluid Tech

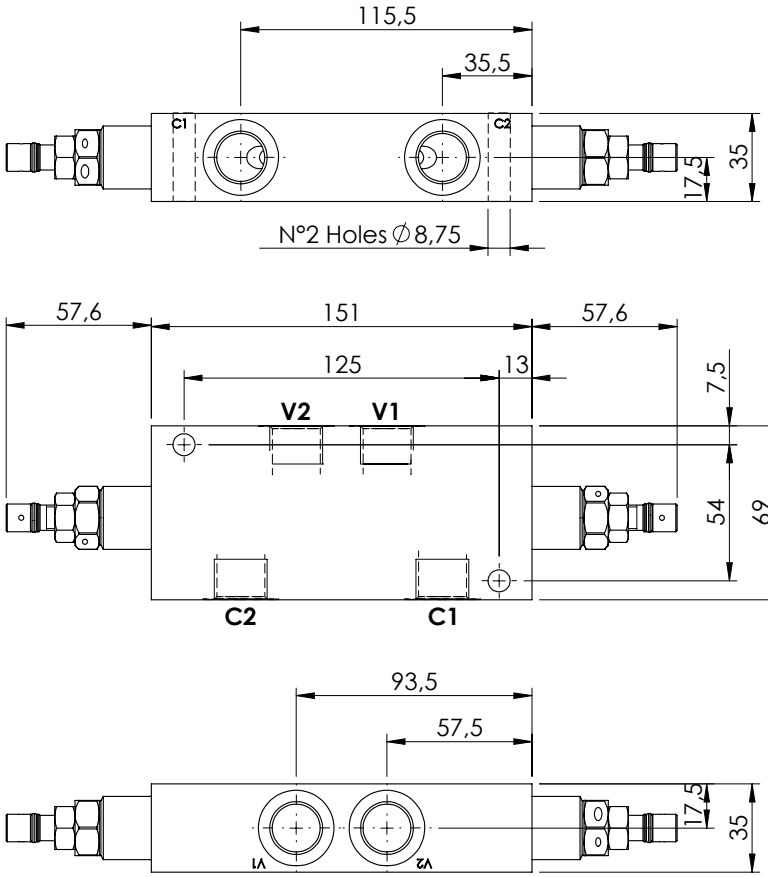





SPECIFICATIONS

Max. operating pressure:	**350 bar**
Rated flow:	**60 l/min**
Weight:	**Aluminium 1.1 kg; Steel 2.7 kg**

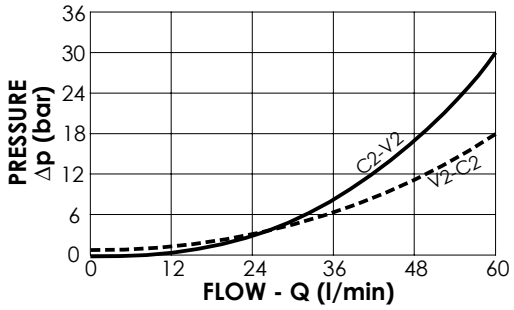

NOTES

Setting: at least 1.3 times the load induced pressure

ORDERING CODES

Quick code	Description	Pilot ratio	Manifold material	Main ports size	Standard setting (bar,Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MB000322	**MBDP-060-ZLDE-04-G12-N350**	**4,2:1**	**Aluminium**	V1, V2: **G1/2"** C1, C2: **G1/2"**	**350**	**100-350**	**166**
MB000449	**MBDP-060-ZLDE-04-G12-N200**	**4,2:1**	**Aluminium**	V1, V2: **G1/2"** C1, C2: **G1/2"**	**200**	**60-210**	**75**
MB000450	**MBDP-060-ALDE-04-G12-N350**	**4,2:1**	**Steel**	V1, V2: **G1/2"** C1, C2: **G1/2"**	**350**	**100-350**	**166**
MB000451	**MBDP-060-ALDE-04-G12-N200**	**4,2:1**	**Steel**	V1, V2: **G1/2"** C1, C2: **G1/2"**	**200**	**60-210**	**75**