

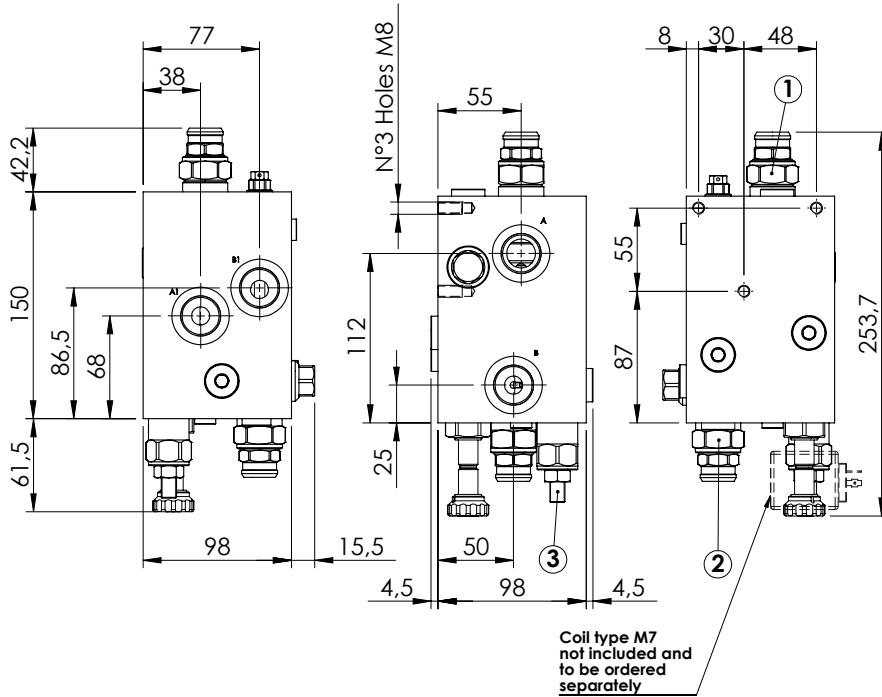


REGENERATIVE VALVE


MRDN-150-ZLNV

REGENERATIVE



SPECIFICATIONS

Max. operating pressure:	210 bar
Rated flow:	100 l/min
Manifold:	Aluminium
Weight:	4,62 kg
Coil type:	M7

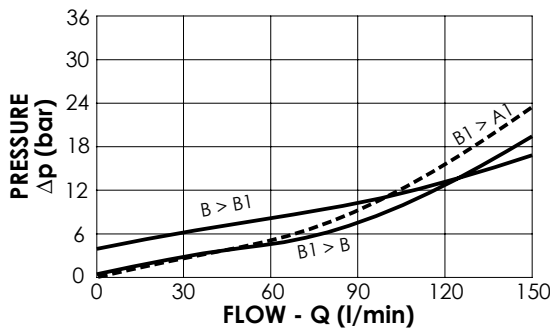

NOTES

Setting: at least 1.3 times the load induced pressure
 Designed for truck mounted cranes
 See chapter 18.00.000 for coils.

ORDERING CODES

Quick code	Description	Pilot ratio	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MB000476	MRDN-100-ZLNV-04-G34-N210	4:1	A,A1,B,B1 : G3/4"	① ② 350 ③ 350	① ② 100-350 ③ 140-350	① ② 103 ③ 114