
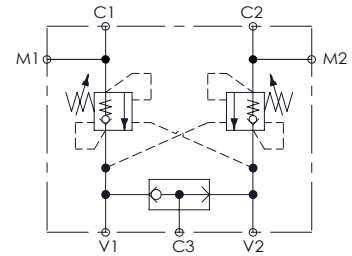
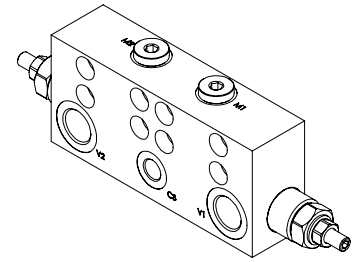


VALVES FOR MOTORS


MBDN-060-ABSF

**DOUBLE ACTING WITH
BRAKE RELEASE**

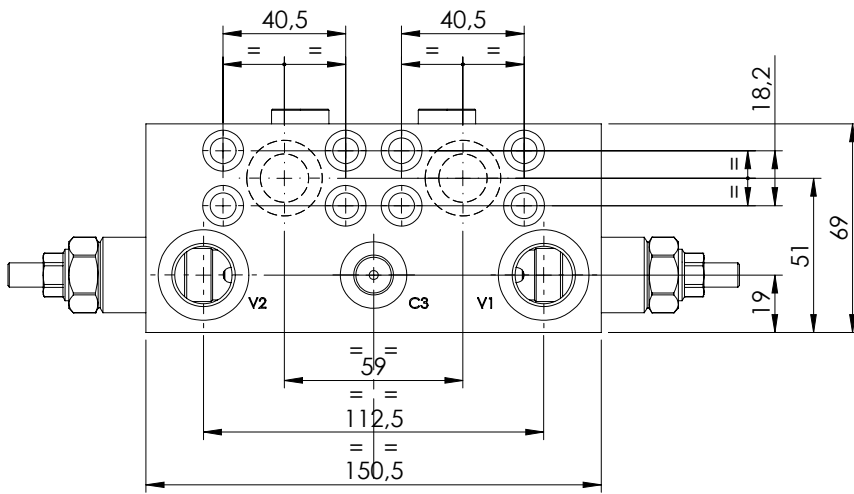

O-Ring 18,64x3,53 - N70

Ø8,5 N°8 Holes


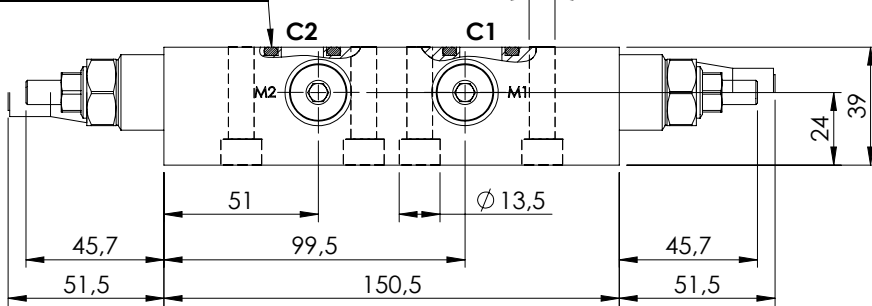


SPECIFICATIONS

Max. operating pressure:	350 bar
Rated flow:	60 l/min
Manifold:	Steel
Weight:	2,91 kg

SEALING CAP

Ordering code:
AT000020

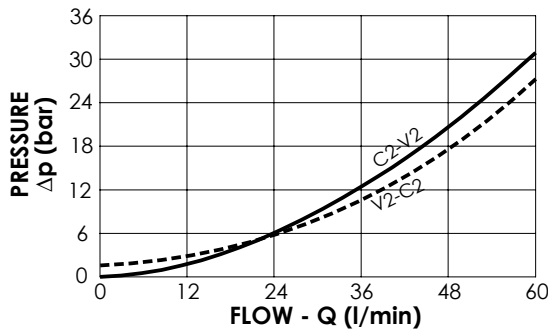

NOTES

Setting: at least 1.3 times the load induced pressure

Designed for REXROTH motors A2FE-28-32 series

ORDERING CODES

Quick code	Description	Pilot ratio	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MB000868	MBDN-060-ABSF-04-G12-N350	4:1	V1, V2: G1/2" C3, M1, M2: G1/4" C1, C2: Ø14	170	100-350	139