




VALVES FOR MOTORS

**MBDN-060-AMSR**

**OVERCENTRE  
WITH BRAKE RELEASE**

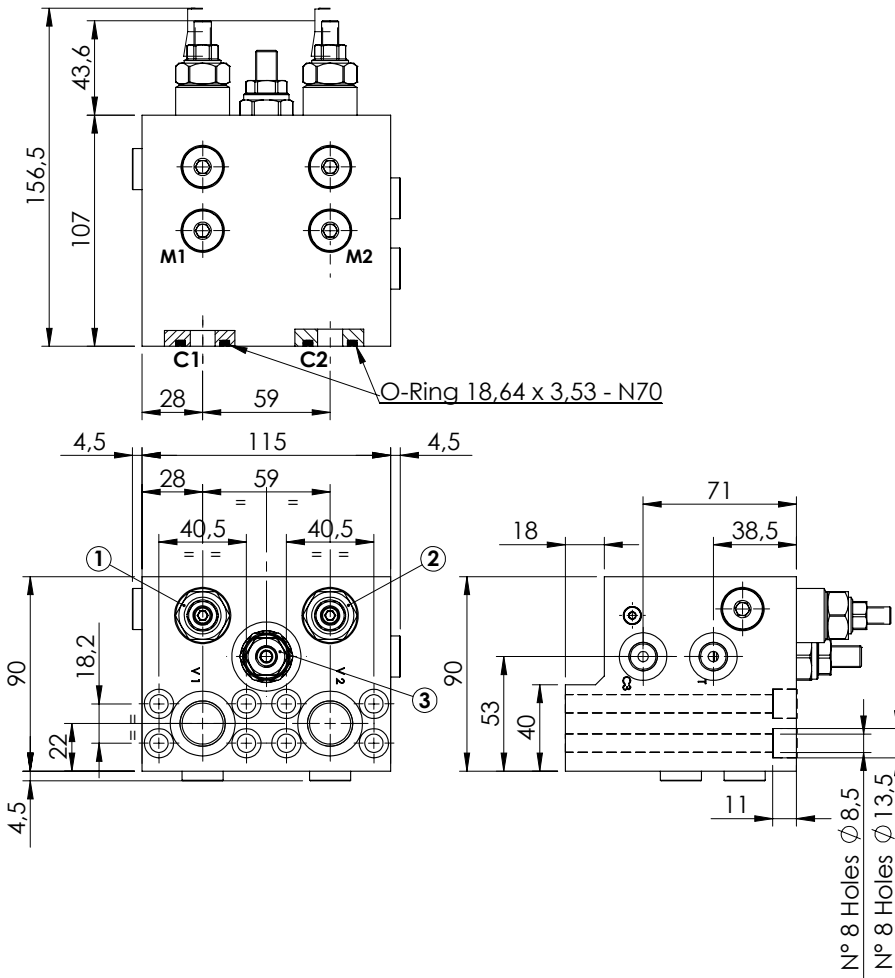


**SPECIFICATIONS**

Max. operating pressure:	420 bar
Rated flow:	60 l/min
Manifold:	Steel
Weight:	7,04 kg

**SEALING CAP**

Ordering code:  
AT000020

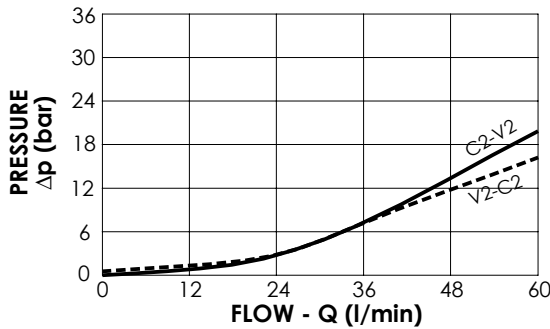

**NOTES**

Setting: at least 1.3 times the load induced pressure  
Designed for REXROTH A2FE 28-32 motors

**ORDERING CODES**

Quick code	Description	Pilot ratio	Main ports size	Standard setting (bar, Q=5 l/min)	Adjust. range (bar)	Pressure increase (bar/turn)
MB000483	MBDN-060-AMSR-11-S12-N420	11:1	V1, V2: G1/2" C1, C2: 1/2 SAE 6000 C3, T, M1, M2: G1/4"	① ② : 350 ③ : 50	① ② : 80-350 ③ : 10-60	① ② : 161 ③ : 6