


SPECIFICATIONS

| | |
|--------------------------|-----------|
| Max. operating pressure: | 300 bar |
| Rated flow: | 120 l/min |
| Manifold: | Aluminium |
| Weight: | 5,06 kg |

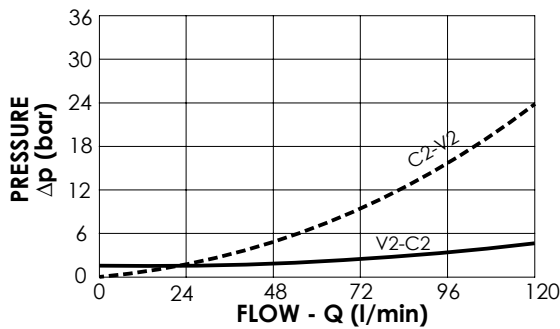

NOTES

Setting: at least 1.3 times the load induced pressure

ORDERING CODES

| Quick code | Description | Pilot ratio | Main ports size | Standard setting (bar, Q=5 l/min) | Adjust. range (bar) | Pressure increase (bar/turn) |
|------------|---------------------------|-------------|-----------------------------------|-----------------------------------|---------------------|------------------------------|
| MN000013 | MNDN-120-LLST-08-G34-N300 | 8:1 | V1,V2,C1,C2 : G3/4" T : G 1/2" | 150 | 100-300 | 111 |
| MN000012 | MNDN-120-LLST-03-G34-N300 | 3:1 | V1,V2,C1,C2 : G3/4" T : G 1/2" | 150 | 70-210 | 73 |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |