





Accumulators

Accessories

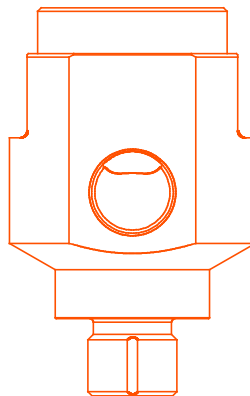

HA nitrogen blocks and adapters

HANS-00030-NUX-000-N14-S000

Product type

HA Accumulators accessories

Type

A Oil adapter
N Nitrogen block

Characteristic

A 1 port on the body (only for nitrogen blocks)
C Oil port reduction
S Oil port ANSI flange (see specific data sheet)
N Nitrogen adapters (see specific data sheet)

Dimensions

00200 Accumulator port 2" (only for adapters)

00030 Hex. nitrogen blocks

See table (Size) for other dimensions

Seals

N NBR
V VITON
E ECO
L LOW TEMP

Position nitrogen valve (only for nitrogen blocks)

U Upper
L Lateral

Components (only for nitrogen blocks)

D With rupture disc.
X Without components
G Gauge
M Minipresa

Opening

G34 3/4" GAS (for adapters is the second opening)

G14 1/4" GAS (for nitrogen blocks is the rupture disc. opening)

See table for other openings

Material

N Carbon steel
S Stainless steel

Setting pressure for components (only for nitrogen blocks)

000 0 bar

240 240 bar


See table for other settings

Accessories


ACCUMULATOR

New!





- 1 Oil adapter
- 2 Nitrogen blocks

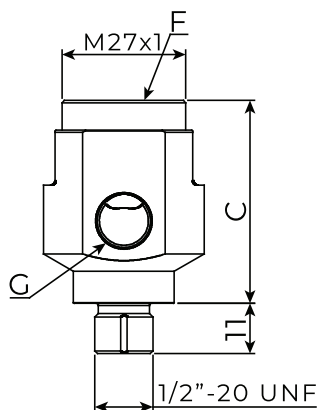

Upper nitrogen valve

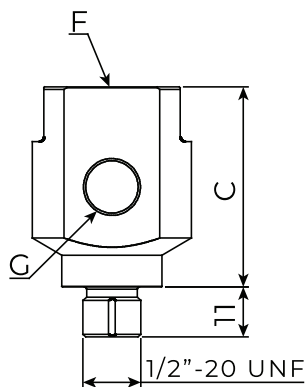

Lateral nitrogen valve

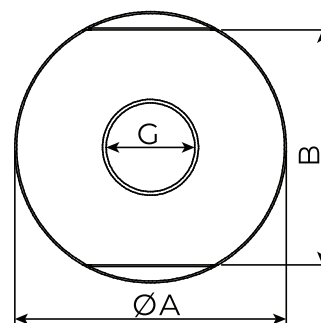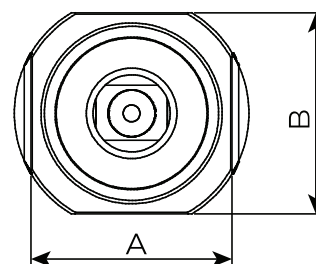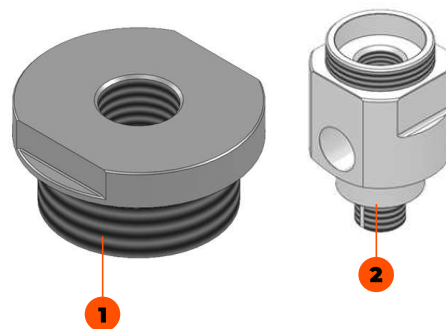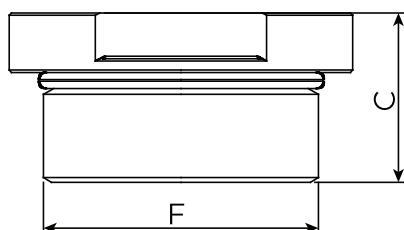

Type	Characteristic	A[mm]	B[mm]	C[mm]	F	G
Nitrogen block	Upper nitrogen valve	30	30	44	1/2"-20 UNF	1/4" NPT
Nitrogen block	Upper nitrogen valve	30	30	44	1/2"-20 UNF	G 1/4"
Nitrogen block	Lateral nitrogen valve	30	28	44	1/4" NPT	1/2"-20 UNF
Nitrogen block	Lateral nitrogen valve	30	28	44	G 1/4"	1/2"-20 UNF
Oil adapter		60	50	30	G 1-1/4"	Blind
Oil adapter		60	50	30	G 1-1/4"	G 3/4"
Oil adapter		60	50	30	G 1-1/4"	G 1"
Oil adapter		60	50	30	G 1-1/4"	G 1/2"
Oil adapter		60	50	30	G 1-1/4"	1/2" NPTF
Oil adapter		75	65	37	G 2"	Blind
Oil adapter		75	65	37	G 2"	G 1-1/2"
Oil adapter		75	65	37	G 2"	G 1-1/4"
Oil adapter		75	65	37	G 2"	G 3/4"
Oil adapter		75	65	37	G 2"	G 1"
Oil adapter		75	65	37	G 2"	G 1/2"
Oil adapter		75	65	37	G 2"	1/2" NPTF